



102

dba: RENEWAL BY ANDERSEN OF COLORADO

Legal Name: Window Warmth LLC | License # CO244783

1401 West Bayaud Ave, Unit 7 | Denver, CO 80223

Phone: 720-829-4330 | Fax: 303-217-4099 | (null)

Measure Tech: Bryce Clauson, (970)560-9086

Paula Jaconetta

24045 County Road 25

Oak Creek, CO 80467

H: (970)846-5940

102

Kitchen

70-1/2" W 79-1/2" H

Patio Door, Gliding - 200 Series Perma-Shield



Patio Door: Gliding, 200 Series Perma-Shield, 2 Panel, Stationary / Active, Aluminum Sill, Exterior White, Interior White **Glass:** All Sash: Tempered High Perf. SmartSun with Heatlock Glass, High Altitude Breather Tubes **Hardware:** Albany, White, Exterior Keyed Lock, Auxiliary Foot Lock Color Matched **Screen:** No Screen **Grille Style:** No Grille **Misc:** None **Construction:** None

Material: A1 - Foam Insulation (0.3), A2 - Ice/Water shield (0.1), A3 - Caulk - Clear (1.5), B1 - Caulk - White (1.5), B2 - Coil - WHITE (0.1), A1 - TM960 - 8' - clear pine- Warehouse (3), G3 - 1x6 - 8' - clear pine- Warehouse (3), G1 - 1x4 - 8' - clear pine- Warehouse (3), A1 - 8' oak Threshold - CO Lumber (1), C1 - 1x4x8 - Cedar - CO Lumber (3)

UNIT NOTES

UNIT CONSTRUCTION

UNIT MATERIALS

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A1 - Foam Insulation

0.3 1s

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A2 - Ice/Water shield

0.1 1s

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A3 - Caulk - Clear

1.5 tubes

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

B1 - Caulk - White

1.5 tubes



106

dba: RENEWAL BY ANDERSEN OF COLORADO

Legal Name: Window Warmth LLC | License # CO244783

1401 West Bayaud Ave, Unit 7 | Denver, CO 80223

Phone: 720-829-4330 | Fax: 303-217-4099 | (null)

Measure Tech: Bryce Clauson, (970)560-9086

Paula Jaconetta

24045 County Road 25

Oak Creek, CO 80467

H: (970)846-5940

106

Primary Bedroom

70-1/2" W 79-1/2" H

Patio Door, Gliding - 200 Series Perma-Shield



Patio Door: Gliding, 200 Series Perma-Shield, 2 Panel, Active / Stationary, Aluminum Sill, Exterior White, Interior White **Glass:** All Sash: Tempered High Perf. SmartSun with Heatlock Glass, High Altitude Breather Tubes **Hardware:** Albany, White, Auxiliary Foot Lock Color Matched **Screen:** No Screen **Grille Style:** No Grille **Misc:** None **Construction:** None **Material:** A1 - Foam Insulation (0.3), A2 - Ice/Water shield (0.1), A3 - Caulk - Clear (1.5), B1 - Caulk - White (1.5), B2 - Coil - WHITE (0.1), A1 - TM960 - 8' - clear pine- Warehouse (3), G3 - 1x6 - 8' - clear pine- Warehouse (3), G1 - 1x4 - 8' - clear pine- Warehouse (3), A1 - 8' oak Threshold - CO Lumber (1), C1 - 1x4x8 - Cedar - CO Lumber (3)

UNIT NOTES

UNIT CONSTRUCTION

UNIT MATERIALS

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A1 - Foam Insulation

0.3 1s

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A2 - Ice/Water shield

0.1 1s

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

A3 - Caulk - Clear

1.5 tubes

2 COIL/
CAULK AND
WAREHOUS
E ITEMS

B1 - Caulk - White

1.5 tubes



107

dba: RENEWAL BY ANDERSEN OF COLORADO

Legal Name: Window Warmth LLC | License # CO244783
1401 West Bayaud Ave, Unit 7 | Denver, CO 80223
Phone: 720-829-4330 | Fax: 303-217-4099 | (null)
Measure Tech: Bryce Clauson, (970)560-9086

Paula Jaconetta
24045 County Road 25
Oak Creek, CO 80467
H: (970)846-5940

107

Luca's
70-1/2" W 79-1/2" H
Patio Door, Gliding - 200 Series Perma-Shield



Patio Door: Gliding, 200 Series Perma-Shield, 2 Panel, Active / Stationary, Aluminum Sill, Exterior White, Interior White **Glass:** All Sash: Tempered High Perf. SmartSun with Heatlock Glass, High Altitude Breather Tubes **Hardware:** Albany, White, Auxiliary Foot Lock Color Matched **Screen:** No Screen **Grille Style:** No Grille **Misc:** None **Construction:** None **Material:** A1 - Foam Insulation (0.3), A2 - Ice/Water shield (0.1), A3 - Caulk - Clear (1.5), B1 - Caulk - White (1.5), B2 - Coil - WHITE (0.1), A1 - TM960 - 8' - clear pine- Warehouse (3), G3 - 1x6 - 8' - clear pine- Warehouse (3), G1 - 1x4 - 8' - clear pine- Warehouse (3), A1 - 8' oak Threshold - CO Lumber (1), C1 - 1x4x8 - Cedar - CO Lumber (3)

UNIT NOTES

UNIT CONSTRUCTION

UNIT MATERIALS

2 COIL/ A1 - Foam Insulation 0.3 1s
CAULK AND
WAREHOUS
E ITEMS

2 COIL/ A2 - Ice/Water shield 0.1 1s
CAULK AND
WAREHOUS
E ITEMS

2 COIL/ A3 - Caulk - Clear 1.5 tubes
CAULK AND
WAREHOUS
E ITEMS

2 COIL/ B1 - Caulk - White 1.5 tubes
CAULK AND
WAREHOUS
E ITEMS


Do not remove until final code inspection. Save label for future reference.

ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance

Canada
 energystar.gc.ca



U.S. / É.U.
 energystar.gov

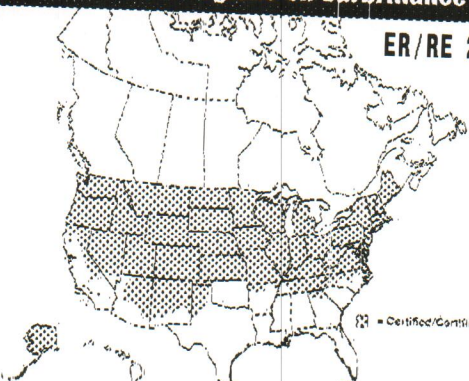

ER/RE 22

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE



National Fenestration
 Rating Council®
CERTIFIED

Andersen®



Perma-Shield Gliding Door
 AND-N-13-01799-00001

Vinyl-Clad Wood Frame, Dual-Pane Low-E Tempered
 Glazing

Product Type: Sliding Patio Doors with Frame


ENERGY PERFORMANCE RATINGS

U-Factor	Solar Heat Gain Coefficient
0.28 (U.S./I-P)	0.32
1.59 (Metric/SI)	

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	
0.55	-

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
 www.nfrc.org



Hallmark Certified
 www.wdma.com

Licensee: 129-H-805

Andersen Corporation

200 Series Perma-Shield Gliding Door

Manufacturer stipulates certification to the applicable standards.

STANDARD	Rating
AAMA/WDMA/CSA 101/152/A440-08	Class LC-PG25 Size Tested 96.0 x 96.5 in DP+25/-25
AAMA/WDMA/CSA 101/152/A440-11	Class LC-PG25 Size Tested 96.0 x 96.5 in DP+25/-25
Tested To: AAMA/WDMA/CSA 101/1.5.2/A440-08 A440S1-09	Class LC-PG25 - Size Tested 2410 x 2526 mm Positive/Negative Design Pressure (DP) = 1200 Pa/-1200 Pa Water Penetration Resistance Test Pressure = 180 Pa Canadian Air Infiltration/Exfiltration = A2
FL1095	
Glazing: 3.9mm FT outer/3.9mm FT inner	
This product meets the Green Seal Standard for Windows, GS-13, for	
Complies with HUD UM Bulletin No. 111	