



Do not remove until final code inspection. Save label for future reference.

**ENERGY STAR® Certified in Highlighted Regions**  
**Certifié ENERGY STAR dans les régions en surbrillance**

**Canada**  
 energystar.gc.ca



**U.S. / É.U.**  
 energystar.gov

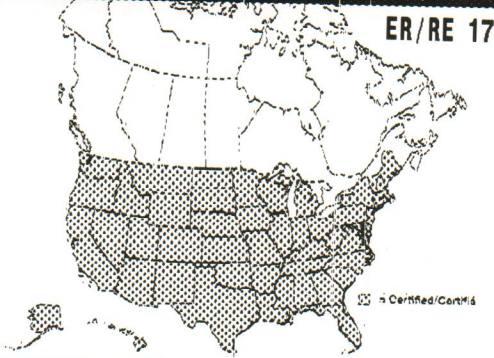

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE



WINDOWS • DOORS  
**Andersen**

**Narroline Gliding Door**  
 AND-N-61-01224-00001  
 Vinyl-Clad Wood Frame, Dual-Pane Low-E SmartSun  
 Tempered with Argon  
 Product Type: Sliding Patio Doors with Frame

**ENERGY PERFORMANCE RATINGS**

U-Factor <b>0.28</b> (U.S./I-P)	1.59 (Metric/SI)	Solar Heat Gain Coefficient <b>0.22</b>
---------------------------------------	---------------------	--

**ADDITIONAL PERFORMANCE RATINGS**

Visible Transmittance <b>0.49</b>	-
--------------------------------------	---

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.  
 www.nfrc.org



Licensee: 129-H-877  
 Andersen Corporation  
 200 Series Narroline Gliding Door  
 Manufacturer stipulates certification to the applicable standards.

STANDARD	Rating
AAMA/WDMA/CSA 101/152/A440-08	Class LC-PG30 71 x 95 DP+30/-30
AAMA/WDMA/CSA 101/152/A440-05	SD-LC30 71 x 95 DP+30/-30
Tested To: AAMA/WDMA/CSA 101/I.5.2/A440-08 A440S1-09	Class LC-PG1440 - 1809mm x 2425mm Positive/Negative Design Pressure (DP) = 1440 Pa/-1440 Pa Water Penetration Resistance Test Pressure = 220 Pa Canadian Air Infiltration/Exfiltration = A3
FL14429	