

Do not remove until final code inspection. Save label for future reference.

18

CSA A440.2

Energy Rating

Rendement Énergétique

Qualified for area indicated.
Admissible pour les régions indiquées.


Canada

energystar.nrcan-
rncan.gc.ca



U.S. / É.U.

energystar.gov

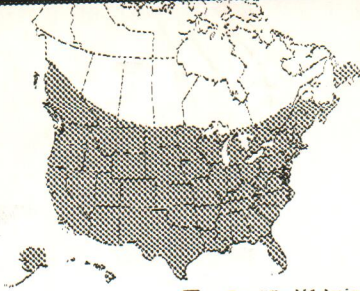

■ = Qualified/Admissible



National Fenestration
Rating Council

CERTIFIED

Renewal
by Andersen

WINDOW REPLACEMENT



an Andersen Company

AND-N-37-00618-00001

Vinyl/Wood Composite Material
Dual Argon Low-E4 Sun
Product Type: Picture

ENERGY PERFORMANCE RATINGS

U-Factor

0.27

(U.S./I-P)

1.53

(Metric/SI)

Solar Heat Gain Coefficient

0.20

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.31

—

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

www.nfrc.org



Window & Door
Manufacturers Association

www.wdma.com

Licensee: CCL 129-H-723.09 CCL 129-H-723.10

Andersen Corporation
RbA Picture Window

Manufacturer stipulates conformance to the following standards

Standard	Rating
AAMA/WDMA/CSA 1011.5.2/A440-08	Class LC-PG35 Size tested: 84.0x84.0 in DP +35/-35
AAMA/WDMA/CSA 1011.5.2/A440-05	DP LC-35 psf



This product meets
Green Seal's
environmental standards
governing energy
efficiency, heavy metals
in the frame and sash
material, packaging, and
consumer educational
materials.

100-00565696-001

Meets or exceeds C.E.C. & I.E.C.C. Air Infiltration requirements of 0.2 CFM/sq. ft. or less. WDMA Hallmark Certification Program