#### PERMIT MUST BE WAINTAINED AT THE WORK SITE



### **County of Routt**

136 6th Street, First Floor Steamboat Springs, CO 80477 Phone: (970) 879-0831



### GRADING & EXCAVATION PERMIT

Permit No:

**RO-16-6** 

Parent Pin:

Parcel ID:

944302003

Date Issued:

6/1/2016

Date Expires:

11/15/2016

**Permit Fees** 

Work Starts:

6/1/2016

Total Permit Fee:

212.00

Permit For:

**Earth/Gravel Excavation Permit** 

Work Description

Driveway cosntruction and building site re-grading.

Project Location:

Applicant Name:

**Tom Dicicco** 

Phone:

(970) 620-3972

Applicant Address:

**PO BOX 928** 

City:

Hayden

State: CO

Zip Code: 81639

Owner Name:

Phone:

Owner Address:

Routt County Road & Bridge

#### **REQUIRED INSPECTIONS:**

1 - INITIAL INSPECTION: Required prior to issuance of permit

2 - NTERIM INSPECTIONS - Random inspections to ensure implementation and maintenance adequate erosion control will be done periodically. Have inspection reports on sire and available.

3 - FINAL INSPECTION - Required prior to Closing permit

Conditions on second page...

**CONDITIONS:** 



## **County of Routt**

136 6th Street, First Floor Steamboat Springs, CO 80477 Phone: (970) 879-0831



### **GRADING & EXCAVATION PERMIT**

**#1300** - Permittee shall be responsible for establishing safety measures sufficient to protect the traveling public from any and all harm during construction. Said safety measures to be in accordance with prevailing local standards.

#1302 - Permittee shall inform the Permitter of construction methods, equipment and operational procedures that will be utilized and obtain the Permitter's concurrence.

- Clearing of trees, bushes and other vegetation shall be held to the minimum required for construction and safety.

- Permittee shall return the right of way, including the road shoulders and ditch sections to its original condition as near as practicable and shall remove all rubbish and debris following completion of construction and before inspection by the Permittor and the Permittee. In the event joint inspection determines additional corrective measures necessary, corrective measures will be initiated within 10 days after completed by the Permittee and completed within a reasonable time thereafter.

- Permittee hereby agrees to institute no action and to hold Permittor harmless from any and all claims or causes of action by reason of Permitter's maintenance, construction or repair of the road which is adjacent, appurtenant or located upon the area for which this permit

is granted.

- The issuance of this permit shall not be deemed to be a warranty or representation by Permitter that the road in question is within the public right of way. It shall be the sole responsibility of the Permittee to obtain such surveys as may be necessary to insure that the improvements permitted herein are placed within the public right of way and Permittee hereby agreed to indemnify, defend and hold Permittor harmless from any damages, liability or cost arising out of the failure of Permittee to properly locate the improvements permitted hereby within the public right of way.



### **ROUTT COUNTY**

### Road & Bridge





### **GRADING & EXCAVATING PERMIT CONDITIONS**

#### REQUIRED INSPECTIONS

INITIAL INSPECTION - Required prior to issuance of permit.

**INTERIM INSPECTIONS** - Random inspections to ensure implementation and maintenance adequate erosion control will be done periodically. Have inspection reports on site and available.

FINAL INSPECTION - Required prior to Closing permit.

### CONDITIONS

#1300: The Permittee shall be responsible for establishing safety measures sufficient to protect the traveling public from any and all harm during construction. Said safety measures to be in accordance with prevailing local standards.

#1302: The Permittee shall inform the Permittor of construction methods, equipment and operational procedures that will be utilized and obtain the Permittor's concurrence.

#1304: The Permittee shall advise the Permittor 48 hours in advance of the date work will be started and shall notify the Permittor a minimum of 12 hours in advance if this date is changed.

#1306: Clearing of trees, bushes and other vegetation shall be held to the minimum required for construction and safety.

#1309: Permittee hereby agrees to institute no action and to hold Permittor harmless from any and all claims or causes of action by reason of Permittor's maintenance, construction or repair of the road which is adjacent, appurtenant or located upon the area for which this permit is granted.

#1311: Dust mitigation must be addressed during construction hauling both inside the confines of the project as well as the surrounding County Road system that is affected by disproportionate truck traffic.

#1312: Surface stabilization must be established if an area is not disturbed after 30 days. All inactive areas should use BMP's to stabilize these surfaces.

#1313: Permit will be enforced until 70% of native vegetation is established.

#1314: The owner/contractor shall prevent the spread of noxious weeds to surrounding lands, and shall comply with the Colorado Noxious Weed Act and the Routt County Noxious Weed Management plan until the owner/contractor has been released from requirements under the Gradinig nd Excavating Permit issued by Routt County.

Permittee /2/10

Permittor Date: <u>6/1//6</u>



# **ROUTT COUNTY**

### Road & Bridge





| P |  | R | N | Λ |  | A | P | P |  |  | C | A | T | 20 | 0 | h | V |  |
|---|--|---|---|---|--|---|---|---|--|--|---|---|---|----|---|---|---|--|
|---|--|---|---|---|--|---|---|---|--|--|---|---|---|----|---|---|---|--|

| Permit No:       | RO-16-6               | Parent Pin:        |                  | Parcel ID: 944302003        |   |
|------------------|-----------------------|--------------------|------------------|-----------------------------|---|
| Date Issued:     | 6/1/2016              | Date Expires:      | 11/15/2016       | Permit Fees:                | *************************************** |
| Work Starts:     | 6/1/2016              | 1                  |                  | Total Permit Fee: 212.00    |   |
| Permit I         | Earth/Gravel I        | Excavation Pern    | nit              |                             |   |
| Project Location | on:                   |                    |                  |                             |   |
|                  |                       |                    |                  |                             |   |
| Applicant Nan    | ne: <b>Tom Dici</b> c | co                 |                  | Phone: (970) 620-3972       |   |
|                  | iress: PO BOX 9       |                    |                  | City: <b>Hayden</b>         |   |
| State: CO        | Zip Code:             | 81639              |                  | Email: diciccotom@yahoo.com |   |
| Work Done F      | or:                   |                    |                  | Phone:                      |   |
| Address:         |                       |                    |                  | City:                       |   |
| State:           | Zip Code:             |                    | -                |                             |   |
| Work Descrip     | otion: Driveway       | y cosntruction and | buiding site re- | grading.                    |   |
|                  |                       |                    |                  |                             |   |
|                  |                       |                    |                  |                             |   |
|                  |                       |                    |                  |                             |   |
|                  |                       |                    |                  |                             |   |
|                  | <u> </u>              |                    |                  | -                           |   |



### **ROAD & BRIDGE**

P. O. Box 773598 Steamboat Springs, CO 80477 Phone: 970-879-0831 Fax: 970-879-3992

# **Permit Application**

Type of permit applied for: Grading and Excavating X Cattle Guard Installation \_\_\_ Adopt A Highway

Driveway 🔀 Special Event Plow

Utility Installation Oversize/Overweight Work in Right-of Way

### **Property Information**

Project physical address: 30498 County ROAD 37 Parcel Number: 944302003 Section(s): 30

City: HAYDEN Township: 5N R87W

Area to be disturbed: 2.5 ACRES

### Owner/Applicant Information

Applicant/Contractor: TOM DICICO

State: CO City: Hayden

State:

Zip: 81639

Mailing Address: POB 928 City: Hayden State: Chone number: 940 445 7264 Email: diciccoloric yakor Gw

Property Owner: Tom Di Cicco (About)
Mailing Address: City:

Zip:

Mailing Address: Phone Number:

Email:

Contractor Name: CHAD ROLANDO/GROUND WORKS 976 620 3972

Project Description: Isstall ACCESS CULVERT, DRIVEWAY & PREPARE POLE BARN PAD SITE

# Storm Water Management Plan

| Project Name:  |  |  |   |                                      |  |
|--|--|--|---|--------------------------------------|--|
|  | S  | HEDESCH  |   |                                      |  |
| Project Name and<br>Location: (PARCEL #<br>Section: Township, &<br>Range, and Address)   | Parcel # 944302003<br>30433 RCR 37<br>Hayden, CO 81639 | OWNER National #   |   | Tom DiCicco<br>POB 928<br>Hayden, CC | 1  |
| Description: (Purpose and<br>Types of Soil Disturbing<br>Activities)   | Excavation for a drive<br>pole barn pad                |  | CONTACT N<br>Address, & F   | Phone#:                              | Routt County Excavating ,<br>County Shop Road 879-0831 |
| # Cubic Yards of soil cut/fill<br>and/or amount of surface<br>area moved.  | disturbance  |  |   |                                      | acre of surface area                                   |
| Site Area:   | The site is approximately,                             | 40 acres of wh   | nich <sub>. 1.</sub> acres wi   | ll be disturbed                      | by construction activities.                            |
| Sequence of Major Activitie The order of activities will b  1 Site Layout 2 Removal of brush 3 Install straw waddles 4 Install 18" x 40" culvert at the common of Receiving Waters | e as follows:<br>road                                  | 6 Install roa<br>7 Excaval<br>8 Export 6<br>9 Revege   | ness driveway cleadbase on drive<br>te for pole bar<br>excess topsoil<br>tate with natu | eway<br>rn                           |  |
|  |  | CONTR  |   |                                      |  |
|  | Erosion  | and Sedime<br>Stabilization  | ent Practice  | 5                                    |  |
| Temporary Stabilization -  | Straw waddles p  |  |   | n-off.                               |  |
| Permanent Stabilization ∈  | Spread site tops                                       | oil and re   | vegetate a  | areas whe                            | re needd.  |
| Weed Control -   | Will comply with F                                     | Routt Coun   | ty Weed st  | andards ar                           | nd will control weed groth.                            |
|  |  | Structural   | Practices   | r acceptada a                        |  |
| Straw waddles w  | vill be placed along                                   | HOMODONIC MERCHANICAL PROPERTY OF THE PERCENTIAL PROPERTY OF THE PERCENT OF THE P |   | nd along p                           | oole barn edges.                                       |
|  | S. Barrier Branch S.                                   | om Water   | Managemer   | it                                   |  |
| Storm water drai   | nage will be the na                                    | atural slop  | e.  |                                      |  |
| Maintenance:   | Straw waddles have a ditch cu                          | will act as<br>t for run o   | a catch fo  | or run off.                          | Topsoil stockpile will                                 |

# Storm Water Management Plan

| D (V)    | OTHER CONTROLS  |
|----------|---|
| Vas      | Topsoil removed during excavation will be used for reclamation and will be spread around the site.  |
| Vas      | Minimal waste product will be generated on site and will be trucked to the local landfill if needed. A porta potty will be onsite for construction workers.                   |
| Jaz      | If hazardous materials are used, MSDS will be onsite and materials will be disposed of by local and Manufacturer regulations.   |
| San      | A porta potty will be onsite and maintained per local regulations.  |
|          | TIMING OF CONTROLS/MEASURES   |
| ΑI       | l erosion control materials will be installed properly before any ground breaking activities.   |
|          | DERHIFICATION OF COMPLIANCE WITH FEDERAL, STATE AND LOCAL REGULATIONS   |
| Th<br>Ha | is plan was prepared in accordance with the Routt County Extension and Sediment Control andbook.  |
|          | MAINTENANCE/INSPECTION PROCEDURES   |
| 50       | Erosion and Sediment Control Inspection and Maintenance Practices   |
| 1        | All control measures will be inspected daily  |
| 2        | All control measures will be maintained   |
| 3        | All sediment will be removed from straw waddles   |
| 4        | A maintenance report will be made after each inspection   |
| 5        | Owner will provide maintenance and repair of the system and is trained in all practices necessary for keeping erosion control methods used on site in good working condition. |
| 6        | If changes are made to SWaMP, they will be marked on plans as well as the inspection report.  |
| ı        |   |

Storm Water Management Plan

#### NINVENTORY SOR ROLL UNION PREVENTION PEAN

The materials or substances listed below are expected to be present onsite during construction:

- Heavy Equipment
- . Lumber
- Fuel

- Seed
- •

#### **Spill Control Practices**

in addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices will be followed for spill prevention and cleanup:

- Materials and equipment necessary for spill cleanup will be kept in designated areas.
- \* All spills will be cleaned up immediately upon discovery.
- Spills of toxis and hazardous materials will be reported to the appropriate state or local government agency, regardless of size.
- Owner will be responsible for the day to day site development.


### STORM WATER MANAGEMENT PLAN CERTIFICATION.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or of those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signed

Date:

Hono DiCiro 5-30-16

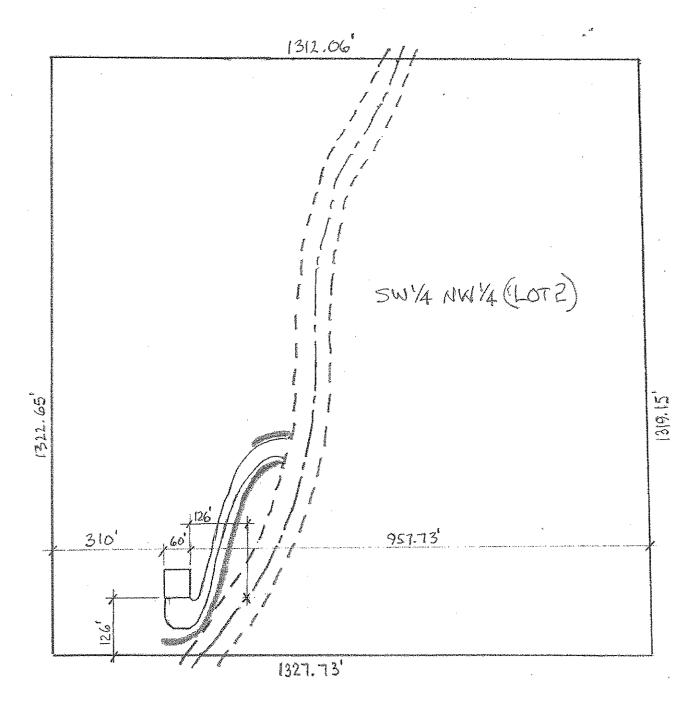

WADLE PREMENT

Tom DiCicco SME Plan LOTZ 1"= 200' 30433 RCR 37 PIN 944302003