



Product Order Form

dba: RENEWAL BY ANDERSEN OF COLORADO

Legal Name: Window Warmth LLC | License # CO244783
1401 West Bayaud Ave, Unit 7 | Denver, CO 80223
Phone: 303-217-4100 | Fax: 303-217-4099 | rnansen@renewalcolorado.com
Measure Tech: Adam Clark,

35040 Country Green Road Kevin Dal
Steamboat Springs , CO 80487
H: (303)808-4163
C: 303-8085445

Sales	Wesley Arnett
Tech	Adam Clark

Windows	0
Specialty	0
Patio Doors	1
Entry Doors	0
Misc.	8

Floor Plan ID#	Product	Insert Frame	Ext. Jamb	Ext. Trim	Checkrail Style	Perf. Upgrade	Exact Order Width	Exact Order Height	Sill Angle	Sash Ratio	Ext. Color	Int. Color	Glazing S1	Glazing S2	Glazing S3	Lifts	Locks	Sash Oper.	Hardware	Hardware Style	Grill Pattern	Grille Type	Lites S1/S3	Lites S2	Screen Type

Floor Plan ID#	Product	Insert Frame	Ext. Jamb	Ext. Trim	Checkrail Style	Perf. Upgrade	Exact Order Width	Exact Order Height	Sill Angle	Sash Ratio	Ext. Color	Int. Color	Glazing S1	Glazing S2	Glazing S3	Lifts	Locks	Sash Oper.	Hardware	Hardware Style	Grill Pattern	Grille Type	Lites S1/S3	Lites S2	Screen Type

Floor Plan ID#	Product	Insert Frame	Ext. Jamb	Ext. Trim	Checkrail Style	Perf. Upgrade	Exact Order Width	Exact Order Height	Sill Angle	Sash Ratio	Ext. Color	Int. Color	Glazing S1	Glazing S2	Glazing S3	Lifts	Locks	Sash Oper.	Hardware	Hardware Style	Grill Pattern	Grille Type	Lites S1/S3	Lites S2	Screen Type
102	DOOR						71 1/4"	79 1/2"																	
Additional Options:								Misc: None									Order Notes: NL6068 71 1/4 x 79 1/2 R hand								

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

SIZING

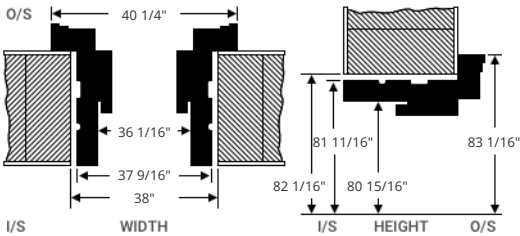

HANDING



Installation Instructions



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.26

0.07

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.13

-



303-217-4100
1401 W Bayaud Ave #5
Denver, CO 80223

QUOTE INFORMATION

Job: Daly, Kevin
Tag: Entries
PO #DALY, KEVIN 3617
Order #9157337-1
Qty: 2

DETAILS

Legacy Single Entry Door in FrameSaver Frame

36"X80"NominaSize
UnitSize379/16"X8111/16"
FrameDepth63/4"
2"StandardBrickmold
LeftHandnswinginsidd.lookingOut
2Pane430Style20-GaugeSmoothSteelDoor
ComforTechDLE-UW(ElevationSeries)(withCapillaryTubes)
Cottag4-Lite5DLGrid1W1H
SnowMistWhitinsideCoaBlackOutsideDLGrid(DustyGrayShadow
Grids)
TexturedPluglessTrim
SnowMistWhitinsideCoaBlackOutside
Hardware

AlHardwareinAntiqueBrassFinish
AccentLockset
ThumbturnDeadbolt

Frame

TexturedCoaBlackAluminumFrameCladding
SnowMistWhitinsideFrame
3TubesCoaBlackCaulk
BronzeZACAuto-AdjustingThreshold(713/16"Depth)
ZincChromateBalBearingHinges(ComplementsBrightandAntiqueBrass)
InstallationKitwithCompositeShims
SecurityPlate
PoplarFlatCasing5'X3/4"NaturaDak
Poplar Quarter Round (1/2" x 3/4") Shoemold - Rustic Bronze

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

SIZING

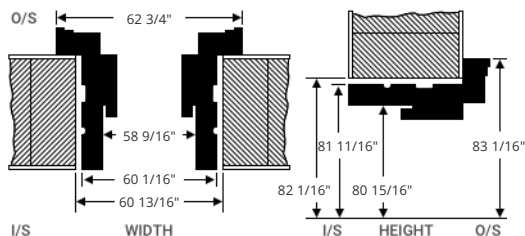

HANDING



Installation Instructions



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.28

0.09

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.17

-



ENERGY STAR® Certified
In All 50 States.



303-217-4100
1401 W Bayaud Ave #5
Denver, CO 80223

QUOTE INFORMATION

Job: Daly, Kevin

Tag: Front Door

PO #DALY, KEVIN 3617

Order #9157337-3

DETAILS

Legacy Single Entry Door in FrameSaver Frame

32" x 80" Nominal Size

12" Sidelite Width

Unit Size: 60 1/16" x 81 11/16"

Frame Depth: 6 3/4"

Inside Mullions: Match Outer Frame Depth

2" Standard Brickmold

Right Hand Inswing - Inside Looking Out

Entry Door

2 Panel 440 Style 20-Gauge Smooth Steel Door

Comfortech DLE-UV (Elevation Series) (with Capillary Tubes)

Cottage (4-Lite) SDL Grid - 1V x 1H

Snow Mist White Inside / Coal Black Outside SDL Grids (Dusty Gray Shadow Grids)

Textured Plugless Trim

Snow Mist White Inside / Coal Black Outside

Sidelites on Both Sides

1 Panel 140 Style 24-Gauge Smooth Steel Sidelite

Comfortech DLE-UV (Elevation Series) (with Capillary Tubes)

Cottage (2-Lite) SDL Grid - 0V x 1H

Snow Mist White Inside / Coal Black Outside SDL Grids (Dusty Gray Shadow Grids)

Textured Plugless Trim

Snow Mist White Inside / Coal Black Outside

Hardware

All Hardware in Antique Brass Finish

Addison Grip Entrance Handle Outside

Accent Handle Inside (2 3/8" Backset)

Addison Thumbturn Deadbolt (2 3/8" Backset)

Frame

Textured Coal Black Aluminum Frame Cladding

Snow Mist White Inside Frame

FrameSaver Inside Mull Cover - Snow Mist White

3 Tubes of Coal Black Caulk

5 Additional Tubes of Clear Caulk

Bronze ZAC Auto-Adjusting Threshold (7 13/16" Depth)

Zinc Chromate Ball Bearing Hinges (Complements Bright and Antique Brass)

Installation Kit with Composite Shims

Security Plate

Poplar Flat Casing (5" x 3/4") - Natural Oak

Poplar Quarter Round (1/2" x 3/4") Shoemold - Coal Black

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

SIZING

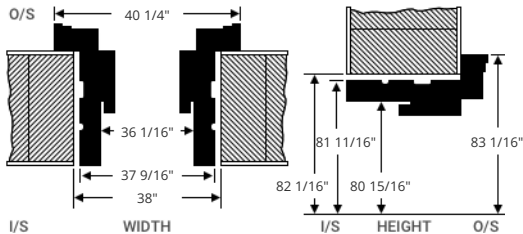

HANDING



Installation Instructions



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.26

0.07

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.13

-



303-217-4100
1401 W Bayaud Ave #5
Denver, CO 80223

QUOTE INFORMATION

Job: Daly, Kevin
Tag: Entries
PO #DALY, KEVIN 3617
Order #9157337-6
Qty: 2

DETAILS

Legacy Single Entry Door in FrameSaver Frame

36" x 80" Nominal Size
Unit Size: 37 9/16" x 81 11/16"
Frame Depth: 6 3/4"
2" Standard Brickmold
Right Hand Inswing - Inside Looking Out
2 Panel 430 Style 20-Gauge Smooth Steel Door
Comfortech DLE-UV (Elevation Series) (with Capillary Tubes)
Cottage (4-Lite) SDL Grid - 1V x 1H
Snow Mist White Inside / Coal Black Outside SDL Grids (Dusty Gray Shadow Grids)
Textured Plugless Trim
Snow Mist White Inside / Coal Black Outside
Hardware

All Hardware in Antique Brass Finish

Accent Lockset

Thumbturn Deadbolt

Frame

Textured Coal Black Aluminum Frame Cladding
Snow Mist White Inside Frame
3 Tubes of Coal Black Caulk
Bronze ZAC Auto-Adjusting Threshold (7 13/16" Depth)
Zinc Chromate Ball Bearing Hinges (Complements Bright and Antique Brass)
Installation Kit with Composite Shims
Security Plate
Poplar Flat Casing (5" x 3/4") - Natural Oak
Poplar Quarter Round (1/2" x 3/4") Shoemold - Rustic Bronze