

DURO-LAST® 60-MIL MEMBRANE

Advantages:

Duro-Last® 60-Mil (DL60) is an excellent choice for projects requiring a long lasting, energy efficient roofing membrane. The membrane is available in custom-fabricated sections or as roll goods. A complete line of custom-fabricated accessories and parapets are available for use with DL60.

Description:

DL60 is composed of PVC film laminated to both sides of a reinforcement fabric (weft-inserted scrim).

Duro-Last membranes must not be used with Duro-Last EV membranes.

PVC Film – Proprietary thermoplastic PVC formulation of resins, plasticizers, stabilizers, biocides, flame retardants, and U.V. absorbents.

- PVC film above weft-inserted scrim – 28 mil, nominal

Weft-Inserted Scrim – An 18 x 14 polyester fabric construction with weft insertion, composed of 840 x 1000 denier threads, provides superior tear and puncture resistance. The polyester thread is treated to prevent wicking.

Total Thickness – 60 mil, nominal.

Weight – 0.36 lb. per square foot.

Colors – White, tan, gray and dark gray.

R-Value – 0.1 R (0.1 ft²·°F·hr/Btu).

Available Configurations:

Custom-fabricated Sections – DL60 is available in custom-fabricated sections as listed within the Ordering and Estimating section on the Duro-Last website.

Roll Dimensions¹

Width	Length (max.)	Roll Area	Approx. Weight	Approx. Coverage ²
64 inches	100 ft.	533 sq. ft.	192 lb.	483 sq. ft.
64 inches	50 ft.	267 sq. ft.	97 lb.	241 sq. ft.
32 inches	100 ft.	267 sq. ft.	97 lb.	217 sq. ft.
12 inches	100 ft.	100 sq. ft.	36 lb.	N/A
8 inches	100 ft.	67 sq. ft.	25 lb.	N/A

¹ Custom rolls of maximum 64 in. by 240 ft. may be produced upon request.

² Assuming 6-inch overlap.

Energy Efficiency:

White DL60 is an excellent product for complying with California Title 24, LEED® and other energy efficiency programs requiring the use of a highly reflective roof membrane.



Cool Roof Rating Council (CRRC)

	CRRC ID	Solar Reflectance		Thermal Emittance		Solar Reflective Index (SRI)	
		Initial	3-yr	Initial	3-yr	Initial	3-yr
White	0610-0001a	0.86	0.74	0.89	0.89	108	91
Tan	0610-0005	0.39	0.33	0.89	0.89	43	35
Gray	0610-0004	0.47	0.40	0.89	0.89	54	45
Dark Gray	0610-0006	0.26	0.25	0.87	0.89	25	25

LEED-NC & LEED-EB Credits – White DL60 alone can obtain 1 credit in either U.S. Green Building Council's LEED-NC or LEED-EB programs. In combination with other design criteria the membrane may help attain other credits.

LEED-NC Credit Category	Duro-Last Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 108
LEED-EB Credit Category	Duro-Last Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 108

Warranty:

The following warranties are available for projects utilizing DL60. Contact Duro-Last for warranty details.

Available Warranties					
Supreme	15-Year NDL Warranty		20-Year NDL Warranty – 15 Years Consequential Damages And 5 Years Material		20-Year NDL Warranty – 15 Years Consequential Damages And 5 Years Material and Labor
Ultra	15-Year NDL Hail Warranty ¹	15-Year NDL Hail & High Wind Warranty ¹	15-Year NDL High Wind Warranty ¹	20-Year NDL High Wind Warranty ¹	25-Year NDL High Wind Warranty ^{1, 2}
Basic	15-Year NDL Warranty ¹		20-Year NDL Warranty ¹		25-Year NDL Warranty ^{1, 2}
Residential	15-Year Residential Material Limited Warranty ¹			20-Year Residential Material Limited Warranty ¹	

¹ Excludes consequential damage coverage.

² Refer to the 25 and 30-Year Warranty Requirements for additional installation criteria.

Codes and Standards:

Underwriters Laboratories (US & Canada), UL Evaluation Report (ER10128), FM Approvals, Canadian Construction Materials Centre (CCMC 13299-L), State of Florida, Miami-Dade County, Texas Department of Insurance.

Storage:

Store rolls lengthwise on pallets. Use tarps to keep rolls dry.

Membrane Attachment:

Mechanically Fastened – DL60 may be mechanically fastened to a variety of roof deck and wall materials. An appropriate slip sheet, insulation or cover board may be required. Refer to the Duro-Last Mechanically Fastened Roofing System Specification for custom-fabricated system requirements. If using roll goods, refer to the Duro-Last Roll Good Mechanically Fastened Roofing System Specification.

Induction welded – Induction welding may be used to attach DL60. An appropriate slip sheet, insulation or cover board may be required. Refer to the Duro-Bond® Induction Weld Roofing System Specification for system requirements.

Adhered – DL60 may be adhered to a variety of properly prepared roof decks, walls, cover boards and insulations. Refer to the Adhered Roofing System Specification for system requirements.

Physical Properties:

DL60 has been subjected to the tests required by ASTM D4434 “*Standard Specification for Poly (Vinyl Chloride) Sheet Roofing*” and has been classified as a Type III, internally reinforced sheet. The results of each test are listed below. ASTM’s Overall Thickness requirements for the membrane are plus or minus 10% (nominal) of the listed Typical Value.

Physical Property	Test Method	ASTM D4434 Requirement	Result	Typical Value
Overall Thickness	ASTM D751	≥ 0.054 and ≤ 0.066 in. (≥ 54 and ≤ 66 mil)	PASS	0.060 in. (60 mil), nominal
Thickness Over Scrim	ASTM D7635	≥ 0.016 in.	PASS	0.028 in. (28 mil)
Breaking Strength ¹	ASTM D751 Grab Method	≥ 200 lbf./in.	PASS	438 x 390 lbf./in.
Elongation ¹	ASTM D751 Grab Method	$\geq 15\%$	PASS	31% x 31%
Seam Strength	ASTM D751 Grab Method	≥ 328 lbf. (75% of Breaking Strength.)	PASS	431 lbf.
Tear Strength ¹	ASTM D751 Procedure B	≥ 45 lbf.	PASS	132 x 163 lbf.
Low Temp. Bend	ASTM D2136	Must pass at -40° F.	PASS	PASS
Heat Aging	ASTM D3045	Conditioned for 56 days in oven maintained at 176° F.	PASS	PASS
Accelerated Aging	ASTM G155	10,000 hours total test time. Irradiance level of 0.35 W/m ² -340nm. Cycle: 102 minutes light, 18 minutes light + H ₂ O spray, 63±2.5° C black panel, 30±5% RH	PASS	PASS
Dimensional Stability ¹	ASTM D1204	Conditioned for 6 hours in oven maintained at 176° F. Allowable change: $\leq 0.5\%$	PASS	-0.45% x -0.20%
Water Absorption	ASTM D570	Immersed in water at 158° F for 168 hours. Allowable weight change: $\leq 3\%$	PASS	2.6%
Static Puncture	ASTM D5602	≥ 33 lbf.	PASS	56 lbf.
Dynamic Puncture	ASTM D5635	≥ 14.7 ft-lbf. (20 J)	PASS	≥ 14.7 ft-lbf. (20 J)

¹ Typical values are shown for both machine and cross machine directions. The machine direction results are listed first.

Additional Tests

Fungi Resistance	ASTM G21	No Sustained Growth or Discoloration
Moisture Vapor Transmission	ASTM E96, Proc. B, Method A	< 0.35 U.S. perms



VersaShield® Fire-Resistant Roof Deck Protection

Help improve your roof system's fire resistance
while protecting it from damaging moisture
with fire-resistant roof deck protection



- Provides a UL Class A rating on most roof systems¹
- Helps protect against dangerous flame spread and penetration into the interior
- Provides a critical layer of extra protection between your roof covering and deck to resist wind-driven rain (or moisture from other sources) that can cause damage to your roof structure

VersaShield® Fire-Resistant Roof Deck Protection

Benefits:

- **Excellent protection** against fire spread and penetration
- **Helps upgrade the UL fire classification of almost any type of roof system**, including upgrading most metal roofs to a UL Class A rating¹
- **An efficient fire-resistant slip sheet** and roof deck protection all in one product
- **Fiberglass-reinforced** so it lies flatter for a better-looking finished roof
- **Slip-resistant walking surface** helps improve traction for installers
- **Light color** provides a cooler working surface (vs. conventional black felts)
- **Eligible for up to a Lifetime[†] limited warranty**. It's also an eligible accessory product in the Roof Deck Protection category of GAF residential enhanced warranties.

VersaShield® Fire-Resistant Roof Deck Protection physical/performance properties

Tensile		
MD	ASTM D146/D828	60 lb./in. width
CMD		30 lb./in. width
Tensile		
MD	ASTM D1922	400 grams
CMD		550 grams
Water vapor transmission		
Permeance	ASTM E96	3 perms minimum
Liquid water transmission test		
	ASTM D4896	Pass

VersaShield® Fire-Resistant Roof Deck Protection Class A rating layer requirements^{*1}

Roofing material	Roof type	Minimum thickness	15/32" plywood	Existing wood shake/shingle	Spaced sheathing
UL Listed Stone Coated Steel	Direct to deck shingle	0.013"	1 Layer	N/A	1 Layer
UL Classified or Listed Steel	Direct to deck shingle	0.013"	1 Layer + 30 Felt	N/A	1 Layer + 30 Felt
Any UL Classified or Listed Steel	Batten required shingle	0.013"	1 Layer	2 Layers	1 Layer
Any UL Classified or Listed Steel	Panel of standing seam	0.015"	1 Layer	N/A	1 Layer
Any UL Classified or Listed Copper	Panel of standing seam	0.016"	1 Layer	N/A	1 Layer
Any UL Classified or Listed Copper	Shingle	0.016"	1 Layer + 30 Felt	2 Layers	1 Layer + 30 Felt
Any UL Classified or Listed Aluminum	Panel or shingle	0.018"	2 Layers	N/A	N/A

^{*}When installed in accordance with section 4.2.1 of GAF ESR-2053, VersaShield® can be used over existing wood shakes or shingles as an alternative of the covering materials specified in 1510.4 of the IBC, section R907.4 of the IRC, or section 1513.3 of Chapter 15 Appendix to the UBC.



To learn more about the Lifetime Roofing System visit **gaf.com/Lifetime**



Product Details:

Nominal Specifications:

For use with asphaltic shingles, metal, slate, wood, and most other roof systems.²


- **Roll size:** 3.5 squares (350 sq. ft. [32.5m²]) (excludes laps)
- **Roll width:** 42" (1.07 m)
- **Roll length:** 100' (30.48 m)
- **Approx. roll weight:** 53 lb. (24 kg)
- **UV exposure:** Resists UV degradation for up to 60 days³
- **Storage:** Do **NOT** double stack pallets. Always protect from moisture, sunlight, and extreme temperatures during storage.

Code Approvals and Standards:

- Meets or exceeds the physical requirements of ASTM D146, D226 Type II, D828, and D4869 Type IV, D6757 Type I or Type II
- Component of a UL Listed ANSI/UL 790 Class A system when used with UL Class A shingles. See UL Certifications Directory for ratings with other roof covering assemblies.¹
- ICC ESR-2053
- ICC AC-160
- Miami-Dade County Product Control approved
- State of Florida approved

Typical applications for combustible decks

Roof covering will determine actual assembly

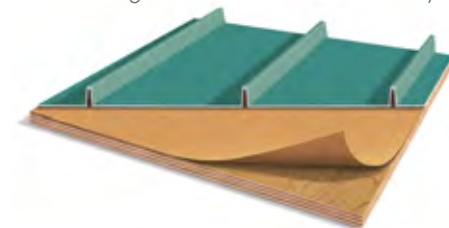

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

¹ Always refer to Underwriters Laboratories Certifications Directory for actual roof system assemblies.

² Contact GAF Technical Support at 1-800-766-3411 or visit gaf.com for acceptable non-asphaltic roofing systems and limited warranty coverage.

³ 60-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While VersaShield® Fire-Resistant Roof Deck Protection is water resistant, it is NOT WATERPROOF. DO NOT USE VersaShield® Fire-Resistant Roof Deck Protection as a temporary roof to protect property or possessions.

We protect what matters most™



Note: We are enhancing our systems and you may notice duplicate entries/missing/outdated data. During this interim period, please contact our Customer Service at <https://www.ul.com/about/locations>.

Roofing Systems

COMPANY

Duro-Last, a division of Holcim Solutions and Products US, LLC
525 W Morley Dr
Saginaw, MI 48601-9485 United States

R10128

"Duro-Last" (PVC) or "Duro-Last X" 40 to 80-mil thick membrane includes white, gray, dark gray, tan and terracotta colors or Designer Series: Rock-Ply, Slate Gray Shingle-Ply and Sandstone Shingle-Ply in 50-mil thick for all Certifications.

"Duro-Tuff" includes the following colors, unless otherwise noted: white, grey, patina, light tan, charcoal, green, dark copper and blue. References to "Duro-Tuff" include 50-mil and 60-mil thick product, unless otherwise noted.

"Duro-Fleece" includes the following colors, unless otherwise noted: white, grey, patina, light tan, charcoal, green, dark copper and blue. References to "Duro-Fleece" include 50-mil and 60-mil thick product, unless otherwise noted.

References to "Duro-Last EV" include 50-mil, 60-mil and 80 mil thick products, unless otherwise noted.

References to "Duro-Last EV Fleece" include 50-mil, 60-mil and 80 mil thick products, unless otherwise noted.

Unless otherwise noted, "Duro-Fleece Plus" can be used in lieu of "Duro-Last" (PVC) or "Duro-Last X", in any system where "Duro-Last" (PVC) or "Duro-Last X" is mechanically attached or adhered with "Duro-Last WB Adhesive II"

Unless otherwise noted, "Duro-Fleece Plus" can be adhered with OMG Inc. "Fleece Membrane Adhesive", applied in beads spaced 6-in. on center minimum, in any system which the membrane can be mechanically attached.

Unless otherwise noted, "Duro-Last" (PVC) or "Duro-Last X" can be used in lieu of "Duro-Tuff" in any system where "Duro-Tuff" is mechanically attached or adhered with "Duro-Last SB IV" or "Duro-Last Solvent-Grip Plus Spray Adhesive" but limited to a maximum incline of 2:12

Unless otherwise noted, a vapor barrier or air barrier (non-UL Certified) may be used below the insulation, barrier board or slip sheet in any of the following Certifications.

Unless otherwise noted, barrier boards and insulation may be mechanically fastened or adhered with UL Classified adhesive in any of the following Certifications.

Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or minimum 1/4-in. thick National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or 7/16-inch thick "DEXcell Cement Roof Board" or minimum 1/4-in. thick United States Gypsum Co. SecuRock® Glass-Mat Roof Board, may be used in lieu of Atlas Roofing Corp. "FR-10" or "FR-50" slip sheets, 1/2-in. thick gypsum wallboard, perlite, polyisocyanurate, and wood fiber in all applicable Certifications.

Any system listed for use over a combustible roof deck can be installed over a non-combustible roof deck to achieve the same Certification.

Uniform thickness or tapered insulation may be used in the following systems provided they do not exceed the indicated incline or thickness.

One or more plies GAF "VersaShield Solo Fire Resistant Slipsheet" mechanically fastened or loose laid may be used in lieu of GAF "VersaShield™ FB-1S" and "VersaShield™ FB-2S" in all applicable Certifications.

"Duro-Guard Iso HD-H" (minimum 1/2-in. thick), "Duro-Guard Iso Composite-H" may be used over any UL Certified polystyrene on non-combustible roof decks. Maximum incline shall be in accordance with the Certification established for the insulation/membrane roof covering system but cannot exceed 2:12.

"Duro-Guard Iso II-H", "Duro-Guard ISO II", "Duro-Guard ISO II-G Tapered", "Duro-Guard ISO III-G", and "Duro-Guard ISO-G Tapered" may be used in any UL Certified insulated roof covering system assembly that incorporates the use of any UL Certified polyisocyanurate insulation.

Any UL Certified EPS, any thickness, may be used below Duro-Last polyisocyanurate insulations on non-combustible decks provided a minimum 1-in. thick layer of Duro-Last polyisocyanurate is used. Maximum incline shall be in accordance with Certification established for the insulation/membrane roof covering system but cannot exceed 1:12.

"Duro-Guard ISO-III-A" may be substituted for "Duro-Guard ISO-II-A" polyisocyanurate insulation in any of the following Certifications.

"Duro-Guard ISO-IV-A" may be substituted for "Duro-Guard ISO-III-A" or "Duro-Guard ISO II-A" polyisocyanurate insulation in any of the following Certifications.

"Duro-Guard HD-A" may be used over polyisocyanurate insulation product in any of the following Certifications.

"Duro-Guard EPS Tapered-A Board" is an acceptable alternate to all EPS insulations utilized in the following Certifications. These boards are available as "Type I", "Type VIII", "Type II" or "Type IX".

Minimum 1/2-in. thick UL Certified gypsum board; or minimum 1/4-in. thick UL Certified Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" roof board may be substituted for any cover board material shown in these Certifications when placed immediately under any UL Certified Membrane. When this is done, the resulting roof covering system is acceptable for use over any combustible or noncombustible roof deck. The butt joints of the gypsum and/or barrier board are offset 6-in. minimum with the joints of the roof deck. The gypsum and/or barrier board must overlay the polystyrene.

A noncombustible roof deck roof covering system Certification that includes 1/2-in. thick wood fiberboard as cover board over EPS may have as an alternate to the minimum 1/2-in. thick fiberboard, a layer of minimum 1-in. thick polyisocyanurate. To maintain the Certification, proper membrane/polyisocyanurate compatibility must be maintained and inclines restrictions observed.

For Combustible Roof Decks - Class A:

1. A minimum 3-in. thick layer or a minimum two layers of 1.5-in. thick of "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H" is placed directly over a combustible roof deck and is covered with any Duro-Last roofing membranes used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 3-in. minimum total thickness of "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H". The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

2. A minimum 1.9-in. thick layer of "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H" is placed over a minimum 1 layer of GAF "VersaShield FB-1S" over a combustible roof deck. The insulation is covered with any UL Certified roofing membrane used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1.9-in. minimum total thickness of "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H". The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

3. A minimum 1/2-in. thick layer of "Duro-Guard Iso HD-H" over a minimum 2.5-in. thick layer of any Duro-Last Certified polyisocyanurate insulation is placed directly over a combustible roof deck and is covered with Duro-Last roofing membranes used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 3-in. minimum total thickness. The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

4. A minimum 1/2-in. thick layer of "Duro-Guard Iso HD-H" over a minimum 1.4-in. thick layer of any Duro-Last Certified polyisocyanurate insulation is placed over a minimum 1 layer of GAF "VersaShield FB-1S" over a combustible roof deck. The insulation is covered with Duro-Last roofing membranes used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1.9-in. minimum total

thickness. The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly; however, the incline cannot exceed 1/2:12.

5. A minimum 1-in. thick layer of "Duro-Guard ISO-IV-A" placed directly over a combustible roof deck and covered with any Duro-Last membrane used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternate, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used above or below the 1-in. minimum total thickness of "Duro-Guard ISO-IV-A". All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly; however, the incline cannot exceed 1:12.

6. A minimum 1-in. thick layer of "Duro-Guard ISO HSP" is placed directly over a combustible roof deck and is covered with any UL Certified roofing membrane used in any UL Class A roof covering assembly to achieve a Class A fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1-in. minimum thickness of Duro-Last "Duro-Guard ISO HSP". The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly; however, the incline cannot exceed 1/2:12.

7. A minimum 1-in. thick layer of "Duro-Guard ISO HSP" over a minimum 3-1/2 in. thick layer of any UL Certified EPS insulation is placed directly over a combustible roof deck and is covered with any UL Certified roof covering membrane used in any UL Class A roof covering assembly to achieve a Class A fire Certification. Any UL Certified insulation, any combination, any thickness, may be used below the 4-1/2 in. minimum total thickness. Insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. "Duro-Guard ISO HSP" must be attached with fasteners and plates. A vapor barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly as published on UL's Product iQ™ Data Base; however, the incline cannot exceed 1/2:12.

8. A minimum 1/2-in. thick layer of "Duro-Guard HD FR" is placed directly over a combustible roof deck and is covered with any UL Classified roofing membrane used in any UL Class A roof covering assembly to achieve a Class A fire Classification. As an alternative, any UL Classified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1/2-in. minimum thickness of "Duro-Guard HD FR". All layers may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

9. A minimum 1/2-in. thick layer of "Duro-Guard HD FR" over a minimum 3-1/2 in. thick layer of any UL Classified EPS insulation is placed directly over a combustible roof deck and is covered with any UL Classified roof covering membrane used in any UL Class A roof covering assembly to achieve a Class A fire Classification. Any UL Classified insulation, any combination, any thickness, may be used below the 4-1/2 in. minimum total thickness. Insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. "Duro-Guard HD FR" must be attached with fasteners and plates. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roofing assembly as published on UL's Product iQ® Data Base; however, the incline cannot exceed 1/2:12.

10. A minimum 1/2 in. layer of "Duro-Guard HD FR" over a minimum 3-1/2 in. layer of any UL Classified EPS insulation is placed directly over a combustible deck and is covered with any UL Classified roofing membrane used in any UL Class A roofing assembly to achieve a Class A fire Classification. Any UL Classified insulation, any combination, any thickness, may be used below the 4-1/2 in. minimum total thickness. Insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. All insulation joints must be staggered a minimum of 6 in. from the deck joints or from the insulation joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roofing assembly as listed in UL's Roofing Materials & Systems Directory; however, the incline cannot exceed 1/2:12.

11. A minimum 1 in. layer of "Duro-Guard Iso III-H" is placed directly over a combustible deck and is covered with any UL Classified roofing membrane used in any UL Class A roofing assembly to achieve a Class A fire Classification. As an alternative, any UL Classified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1 in. minimum thickness of "Duro-Guard Iso III-H". The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation joints must be staggered a minimum of 12 in. from the deck joints or from the insulation joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roofing assembly, however, the incline cannot exceed 1/2:12.

12. A minimum 1 in. layer of "Duro-Guard Iso III-H" over a minimum 3-1/2 in. layer of any UL Classified EPS insulation is placed directly over a

combustible deck and is covered with any UL Classified roofing membrane used in any UL Class A roofing assembly to achieve a Class A fire Classification. Any UL Classified insulation, any combination, any thickness, may be used below the 4-1/2 in. minimum total thickness. All layers may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation joints must be staggered a minimum of 12 in. from the deck joints or from the insulation joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roofing assembly as listed in UL's Roofing Materials & Systems Directory; however, the incline cannot exceed 1/2:12.

13. A minimum 1/2 in. thick layer of "Duro-Guard Iso HD-H" is placed directly over a combustible deck and is covered with any UL Classified roofing membrane used in any UL Class A roof covering assembly to achieve a Class A fire Classification. As an alternative, any UL Classified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1/2 in. minimum thickness. All layers may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation joints must be staggered a minimum of 12 in. from the roof deck joints or from the insulation joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roofing assembly as published on UL's On-Line Certification Directory for the product category Roofing Systems (TGFR); however, the incline cannot exceed 1:12.

For Combustible Roof Decks - Class B:

1. A minimum 1.9-in. thick layer of "Duro-Guard Iso III", "Duro-Guard Iso Composite-H" is placed directly over a combustible roof deck and is covered with Duro-Last roofing membranes used in any UL Class B roof covering assembly to achieve a Class B fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1.9-in. minimum thickness layer of "Duro-Guard Iso III", "Duro-Guard Iso Composite-H". The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

2. A minimum 1/2-in. thick layer of "Duro-Guard Iso HD-H" over a minimum of 1.4-in. thick layer of any Duro-Last Certified polyisocyanurate insulation is placed directly over a combustible roof deck and is covered with Duro-Last roofing membranes used in any UL Class B roof covering assembly to achieve a Class B fire Certification. As an alternative, any UL Certified insulation (except expanded or extruded polystyrene), any combination, any thickness, may be used below the 1.9-in. minimum thickness layer. The insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier or air barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly, however the incline cannot exceed 1/2:12.

3. A minimum 1-in. thick layer of "Duro-Guard ISO HSP" is placed directly over a combustible roof deck and is covered with any UL Certified roofing membrane used in any UL Class A or B roof covering assembly to achieve a Class B fire Certification. Any UL Certified insulation, any combination, any thickness, may be used below the "Duro-Guard ISO HSP". Insulation may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL Certified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Certification established for the membrane/insulation roof covering assembly as published on UL's Product iQ™ Data Base for the product category Roofing Systems.

4. A minimum 1/2 in. thick layer of "Duro-Guard HD FR" is placed directly over a combustible roof deck and is covered with any UL Classified roofing membrane used in any UL Class A or B roof covering assembly to achieve a Class B fire Classification. Any UL Classified insulation, any combination, any thickness, may be used below the "Duro-Guard HD FR". All layers may be loosely laid or attached with fasteners and plates, hot roofing asphalt or cold adhesive. A vapor barrier (non-UL classified) may also be used below the insulation. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below. The maximum incline shall be in accordance with the Classification established for the membrane/insulation roof covering assembly as published on UL's Product iQ™ Data Base for the product category Roofing Systems.

A vapor barrier may be optionally installed under all systems utilizing any "Duro-Guard ISO" insulation.

Unless otherwise indicated "Duro-Last® Roof Pavers" may be placed over the surface of any UL Certified Duro-Last membrane roofing system and maintain the rating of the Certification, limited to a 2.5 in. incline.

Unless otherwise indicated, "Duro-Last Roof Pavers" may be placed over the surface of any UL Certified TPO, EPDM, or PVC roofing systems and maintain the rating of the Certification, limited to a 2.5 in. incline.

SINGLE PLY MEMBRANE SYSTEMS

Class A, B or C

1. Deck: C-15/32

Incline: See Note 1

Vapor Barrier (Optional): — Elevate "V-Force™", Vapor Shield Membrane self-adhered.

Insulation (Optional): — "Duro-Guard ISO III-E²" or "Duro-Guard ISO Composite-E²" or "Duro-Guard ISO II-E²" any thickness.

Barrier Board: — Minimum 1/2-in. thick gypsum wallboard, or minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard" or "DensDeck Prime® Roofboard", "DensDeck® StormX™ Prime Roofboard" or "DensDeck DuraGuard™ Roofboard", joints in barrier board offset 6 in. with joints in deck.

Roofing System: — "Duro-Last", or "Duro-Last X", or "Duro-Tuff", or "Duro-Fleece", or "Duro-Last EV", or "Duro-Last EV Fleece" or "Duro-Fleece Plus", insulated. Insulation may be adhered or mechanically attached with Elevate "I.S.O. Twin Pack™", "I.S.O. Twin Pack™ Green", "I.S.O. Stick™" or "I.S.O. Spray™ R" or "Twin Jet" spray adhesive.

Note: 1: Classification (A, B or C) and maximum incline will be the same as that for the currently Classified insulated system, currently limited to a combustible roof deck.

2. Deck: C-15/32

Incline: 1/4 inch

Vapor Barrier (Optional): — Elevate "V-Force™", Vapor Shield Membrane self-adhered.

Insulation (Optional): — "Duro-Guard ISO III-E²" or "Duro-Guard ISO Composite-E²" or "Duro-Guard ISO II-E²" any thickness.

Insulation: — 1.0 inch minimum thickness "Duro-Guard ISO III-E²", joints in insulation board offset 6 in. with joints in deck.

Roofing System: — "Duro-Last", or "Duro-Last X", or "Duro-Tuff", or "Duro-Fleece", or "Duro-Last EV", or "Duro-Last EV Fleece" or "Duro-Fleece Plus", insulated. Insulation may be adhered or mechanically attached with Elevate "I.S.O. Twin Pack™", "I.S.O. Twin Pack™ Green", "I.S.O. Stick™" or "I.S.O. Spray™ R" or "Twin Jet" spray adhesive.

Note: 1: Classification (A, B or C) and maximum incline will be the same as that for the currently Classified insulated system, currently limited to a combustible roof deck.

Class A - Ballasted

Unless otherwise indicated, insulation may be loose laid or mechanically fastened; membrane may be loose laid; mechanically fastened or adhered in place.

1. Deck: NC

Incline: 2

Insulation: — Any UL Certified isocyanurate insulation (tapered or uniform thickness), any thickness, any UL Certified EPS insulation (tapered or uniform thickness), any thickness covered with 1-in. perlite or Owens-Corning "Roof Deck Board".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", laid loose.

Surfacing: — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs./100-ft.²

2. Deck: C-15/32

Incline: 2

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness.

Coverboard: — Minimum 3/4 in. thick perlite.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X" or any UL Classified membrane.

Surfacing: — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs/100-ft.²

3. Deck: NC

Incline: 2

Note: Deck must be one of the following: A.) Monolithic poured cementitious deck. B.) Steel covered with minimum 1/2 in. thick gypsum board or perlite board. C.) Structural decks with all joints covered with Type 30 base sheet, extending a minimum of 6-in. on each side of joint. D.) Metal deck covered with cellular concrete, gypsum concrete, vermiculite concrete or perlite concrete.

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness,

Coverboard: — Minimum 1-in. thick wood fiber or perlite.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X" or any UL Classified membrane.

Surfacing: — River bottom stone (3/4 in. to 1-1/2 in. diameter), 1000-lbs./100-ft.².

4. Deck: NC**Incline:** 2**Insulation:** — "Duro-Guard Iso II-H", any thickness.**Membrane:** — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.**Surfacing:** — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs./100-ft.²**5. Deck:** NC**Incline:** 2**Insulation:** — "Duro-Guard Iso Foil-H" or "Duro-Guard Iso NB-H", any thickness.**Membrane:** — Any UL Certified, laid loosely.**Surfacing:** — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs./100-ft.²**6. Deck:** C-15/32**Incline:** 2**Insulation:** — "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", any thickness, field covered with minimum 3/4 in. thick perlite.**Membrane:** — "Duro-Last EV"**Surfacing:** — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lb/100-ft.²**7. Deck:** NC**Incline:** 2**Insulation:** — "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", any thickness**Coverboard:** — Minimum 3/4 in. thick field perlite.**Membrane:** — "Duro-Last EV"**Surfacing:** — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs/100-ft.².**8. Deck:** NC**Incline:** 2

Note: Deck must be one of the following: A.) Monolithic poured cementitious deck. B.) Steel covered with minimum 1/2-in. thick gypsum board or perlite board, minimum. C.) Structural decks with all joints covered with Type 30 base sheet, extending a minimum of 6 in. on each side of joint. D.) Metal deck covered with cellular concrete, gypsum concrete, vermiculite concrete or perlite concrete.

Insulation: — "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", any thickness.**Membrane:** — "Duro-Last EV"**Surfacing:** — River bottom stone (3/4 in. to 1-1/2 in. diameter), 1000-lbs./100-ft.²**9. Deck:** NC**Incline:** 2**Insulation:** — Polyisocyanurate, glass fiber or perlite, any thickness, laid loosely or mechanically fastened or adhered with any UL Certified insulation adhesive.**Membrane:** — Any UL Certified PVC single ply membrane fully adhered with "Duro-Last Solvent-Grip Spray Adhesive" bonding adhesive applied at a rate of 6 lb./100 ft² or 1 canister/500 ft².**Surfacing:** — No. 6 River bottom stone 3/4 to 1 1/2-in. diameter applied at 1000-lbs/100-ft².**10. Deck:** C-15/32**Incline:** 2**Insulation (Optional):** — Perlite, glass fiber, wood fiber, isocyanurate, "Duro-Guard ISO III-E²" or "Duro-Guard ISO Composite-E²" or "Duro-Guard ISO II-E²" insulation or any other UL Classified insulation, any combination.**Base Sheet (Optional):** — Type G1, Type G2 or Type G3 or Elevate Protection Mat (not UL Classified).**Membrane:** — "Duro-Last", or "Duro-Last X", or "Duro-Tuff", or "Duro-Fleece", or "Duro-Last EV", or "Duro-Last EV Fleece" or "Duro-Fleece Plus".**Insulation (Optional):** — Dow Chemical "STYROFOAM RM, PD, SM, TG" or "STYRORIB", 1 in. minimum. When the insulation is applied in more than one layer, successive layers shall be installed without attachment to the preceding layer.**Slip Sheet (Optional):** — Fiberglass mat may be laid between the insulation and membrane.**Scrim (Optional):** — Elevate "Fabrene", "International Paper D689" or "Rufon Polypropylene", 2-oz/yd² (not Classified).**Surfacing:** — One of the following: a.) 900-lb/100-ft.² minimum of crushed stone or river bottom stone which is free from dirt and graded to a typical size of 3/4 in. with a minimum of 1/2 in. for crushed stone and 3/4 in. to 1-3/4 in. for river bottom stone. b.) Concrete blocks weighing not less than 10-lb/100-ft.² ft and spread not more than 1/8 in. apart.**11. Deck:** C-15/32**Incline:** 2**Insulation:** — "Duro-Guard ISO III-E²" or "Duro-Guard ISO Composite-E²", any thickness, loose laid or mechanically fastened.**Membrane:** — "Duro-Last", or "Duro-Last X", or "Duro-Tuff", or "Duro-Fleece", or "Duro-Last EV", or "Duro-Last EV Fleece" or "Duro-Fleece Plus", loose laid or mechanically fastened.**Surfacing:** — River bottom stone (3/4 to 1-1/2 in. diameter), 1000-lbs/100-ft.²

Class A - Fully Adhered

"Duro-Last Solvent-Grip Spray Adhesive" adhesive may be used at an application rate of 7.25 lbs. to 9.6 lbs./sq. in any of the systems mentioned below.

1. Deleted

2. Deleted

3. Deleted

4. Deleted

5. Deleted

6. Deleted

7. Deleted

8. Deleted

9. Deleted

10. Deleted

11. **Deck:** C-15/32 **Incline:** Unlimited

Insulation: — Any UL Certified polyisocyanurate, any thickness, adhered with hot roofing asphalt or Dow Chemical's "Insta-Stik".

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board"

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last SB IV" at 1-1/3 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

12. **Deck:** NC **Incline:** 2

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last SB IV" at 1-1/3 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

13. **Deck:** C-15/32 **Incline:** Unlimited

Insulation: — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/2-in. thick gypsum board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece Plus", adhered with "Duro-Last WB Adhesive 2" at 1-gal./100-ft.²

14. Deleted.

15. **Deck:** NC **Incline:** 2

Insulation: — Polystyrene, any thickness.

Coverboard: — Minimum 1/2-in. thick HD wood fiberboard.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X" adhered with "Duro-Last SB IV" at 1-1/3 gal./100-ft.²

16. **Deck:** NC **Incline:** See note **Impact:** 3

Insulation: — Polyisocyanurate insulation (see note), 1 to 3-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X"

Note: See individual Certification of specific polyisocyanurate insulation, adhesive and adhesive application rate used.

17. **Deck:** NC

Incline: See note

Impact: 4

Insulation: — Polyisocyanurate insulation (see note), minimum 4-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X"

Note: See individual Certification of specific polyisocyanurate insulation, adhesive and adhesive application rate used.

18. **Deck:** C-15/32

Incline: See note

Impact: 3

Insulation (Optional): — Polyisocyanurate insulation, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X"

Note: See individual Certification of specific adhesive and adhesive application rate used.

19. **Deck:** C-15/32

Incline: See Note 2

Impact: 3

Base Sheet: — One ply Type G2, Atlas Roofing Corp. "FR-10" or GAF "VersaShield", mechanically attached.

Barrier Board: — Minimum 1/4-in. thick United States Gypsum Co. "Securock Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck. (See Note 1).

Insulation (Optional): — Polyisocyanurate insulation (See Note 2).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X"

Note 1: If insulation is not used, barrier board is to be mechanically fastened with 2-in. polyplates and #14 screws.

Note 2: Maximum incline shall be in accordance with Certification established for insulation/membrane/adhesive roof covering system but is limited to 3:12.

20. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5-gal./100-ft.²

21. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal./100-ft.²

22. **Deck:** C-15/32

Incline: Unlimited

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

23. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.²

24. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.²

25. Deck: C-15/32 **Incline:** Unlimited

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

26. Deck: C-15/32 **Incline:** 2

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece Plus", adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

27. Deck: C-15/32 **Incline:** Unlimited

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

28. Deck: NC **Incline:** 2

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32 in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq

29. Deck: NC **Incline:** 2

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

30. Deck: C-15/32 **Incline:** 2

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

31. Deck: NC **Incline:** 2

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

32. Deck: NC **Incline:** 2

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

33. **Deck:** C-15/32

Incline: 2

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

34. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard ISO-II-A", "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last SB IV" at 0.75-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

35. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard Iso II-H", "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last SB IV" at 0.75-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

36. **Deck:** C-15/32

Incline: Unlimited

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last SB IV" at 0.75-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

37. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard ISO-II-A", "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last WB Adhesive II" at 0.45-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

38. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard Iso II-H", "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last WB Adhesive II" at 0.45-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

39. **Deck:** C-15/32

Incline: Unlimited

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with all joints staggered a minimum of 6 in. from the plywood joints.

Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last WB Adhesive II" at 0.45-gal./100-ft² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq.

40. **Deck:** NC

Incline: Unlimited

Membrane: — "Duro-Fleece", 50 or 60-mil thick, adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

41. **Deck:** C-15/32

Incline: 3

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 50 to 80-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft² or H.B. Fuller Company "Millennium PG-1 EF ECO", applied in a spatter pattern.

42. **Deck:** NC

Incline: 3

Membrane: — "Duro-Fleece", 50 to 80-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft² or H.B. Fuller Company "Millennium PG-1 EF ECO", applied in a spatter pattern.

43. **Deck:** C-15/32

Incline: 2

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Base Sheet: — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.

Membrane: — "Duro-Fleece Plus", fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

44. **Deck:** NC

Incline: 2

Base Sheet: — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.

Membrane: — "Duro-Fleece Plus", fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

45. **Deck:** C-15/32

Incline: 2

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Base Sheet: — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.

Membrane: — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

46. **Deck:** NC

Incline: 2

Base Sheet: — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.

Membrane: — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

47. **Deck:** NC

Incline: 3

Impact: 4

Insulation (Optional): — Any UL Classified Polyisocyanurate insulation, any thickness.

Coverboard: — Continuous Materials Holdings "Everboard™ QB", minimum 5/16-in. thick adhered with OMG INC "Olybond 500" applied in ribbons 12 inches apart.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5-gal./100-ft² or "Duro-Last WB Adhesive II" at 1-gal./100-ft²

48. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Continuous Materials Holdings LLC "Everboard HB+", min. 7/16 in. thick, mechanically fastened.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5-gal./100-ft²

49. **Deck:** NC

Incline: 3

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Continuus Materials Holdings LLC "Everboard HB+", min. 7/16 in. thick, mechanically fastened.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.²

50. **Deck:** NC

Incline: 1

Insulation (Optional): — "Duro-Guard ISO-II-H" or "Duro-Guard ISO-II-A", any thickness.

Membrane: — "Duro-Fleece", adhered with "Duro-Last WB Adhesive II" at 0.50-gal./100-ft.².

51. **Deck:** C-15/32

Incline: 3

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last EV Fleece", 50 – 80 mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5 lb/100-ft² or H.B. Fuller Company "Millennium PG-1 EF ECO", applied in a spatter pattern.

52. **Deck:** C-15/32

Incline: 3

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last EV Fleece", 50 – 80 mil thick, fully adhered with Soprema "Duotack SPF", applied at a rate of 3.7 lb/100-ft² or H.B. Fuller Company "Millennium PG-1 EF ECO", applied in a spatter pattern.

53. **Deck:** NC

Incline: 2

Insulation (Optional): — "Duro-Guard ISO-II-A" or "Duro-Guard ISO-II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

54. **Deck:** NC

Incline: 2

Impact: 4

Insulation (Optional): — Any UL Classified Polyisocyanurate insulation, any thickness.

Coverboard: — Continuus Materials Holdings "Everboard™ QB", minimum 5/16-in. thick adhered with OMG INC "Olybond 500" applied in ribbons 12 inches apart.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

55. **Deck:** NC

Incline: 2

Insulation (Optional): — "Duro-Guard ISO-II-A" or "Duro-Guard ISO-II-H", any thickness.

Coverboard (Optional): — Continuus Materials Holdings LLC "Everboard HB+", min. 7/16 in. thick, mechanically fastened.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last Solvent-Grip Plus Spray Adhesive" at 5.81 lbs./sq.

56. **Deck:** C-15/32

Incline: 3

Barrier Board (Optional): — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Vapor Barrier (Optional): — Vapor barrier or air barrier (non-UL Certified) may be used below the insulation.

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 50–80-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.², "Duro-Tuff" (PVC), 50 or 60 mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq., "Duro-Last EV", adhered with "Duro-Last SB IV" at 0.75-gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq., "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last SB IV" at 1-1/3-gal./100-ft.² or "Duro-Last Solvent-Grip Plus Spray Adhesive" at 7.24 lbs./sq., "Duro-Fleece Plus", adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.², "Duro-Last EV Fleece", 50–80 mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.², "Duro-Last EV Fleece", 50–80 mil thick, fully adhered with Soprema "Duotack SPF",

applied at a rate of 3.7-lbs./100-ft.².

57. **Deck:** NC

Incline: 1/2

Insulation: "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness, mechanically fastened.

Membrane: "Duro-Last" (PVC) adhered with "Duro-Last SB IV" at 1-1/3-gal/100-ft² or "Duro-Tuff" adhered with "Duro-Last SB IV" at 1-3/5-gal/100-ft² or "Duro-Last WB Adhesive II" at 1-gal/100-ft².

58. **Deck:** NC

Incline: 1

Insulation: "ISOGARD GL", "ISOGARD CG", or "ISOGARD HD", any thickness, mechanically fastened.

Membrane: "Duro-Fleece" or "Duro-Last EV Fleece" adhered with "Duro-Grip CR-20" at 5-lbs/100-ft².

59. **Deck:** NC

Incline: 2-1/2

Barrier Board: — 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", mechanically fastened.

Membrane: — "Duro-Fleece" or "Duro-Last EV Fleece", fully adhered with OMG "OlyBond500", applied in a spatter pattern.

60. **Deck:** NC

Incline: Unlimited

Membrane: — "Duro-Fleece", fully adhered with "Duro-Last WB II Adhesive" at rate of 1-gal/100-ft².

61. **Deck:** NC

Incline: 1-1/2

Insulation: — "Duro-Guard ISO-II-H", any thickness, mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", fully adhered with "Duro-Last WB II Adhesive".

62. **Deck:** NC

Incline: 1-1/2

Insulation: — "ISOGARD GL" or "ISOGARD CG" or "ISOGARD HD", any thickness, mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", fully adhered with "Duro-Last WB II Adhesive".

Class B - Fully Adhered

1. **Deck:** NC

Incline: 2-1/2

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32 in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last SB IV" at 1-1/3-gal/100-ft²

2. **Deck:** NC

Incline: 3

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", 50-mil thick, adhered with "Duro-Last SB IV" at 1-1/3 gal/100-ft²

3. **Deck:** NC

Incline: 3

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Membrane: — "Duro-Fleece Plus" (PVC), adhered with Adco "Millennium PG-1 Pump Grade Adhesive", applied in beads spaced 6-in. OC minimum

4. **Deck:** NC

Incline: 3

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Membrane: — "Duro-Fleece Plus" (PVC), adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

5. **Deck:** C-15/32

Incline: 3

Insulation (Optional): — Any UL Certified polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 80-mil thick, adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft²

6. Deck: C-15/32**Incline:** 3**Insulation (Optional):** — Any UL Certified, any thickness.**Barrier Board:** — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.**Membrane:** — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last SB IV" at 1-3/5 gal/100-ft.²**7. Deck:** C-15/32**Incline:** 3**Insulation (Optional):** — Any UL Certified, any thickness.**Barrier Board:** — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.**Membrane:** — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.²**8. Deck:** NC**Incline:** 3**Membrane:** — "Duro-Fleece", 80-mil thick, adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²**9. Deck:** C-15/32**Incline:** 3**Insulation (Optional):** — Any UL Certified polyisocyanurate, any thickness.**Barrier Board:** — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.**Base Sheet:** — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.**Membrane:** — "Duro-Fleece Plus", fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²**10. Deck:** NC**Incline:** 3**Base Sheet:** — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.**Membrane:** — "Duro-Fleece Plus", fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²**11. Deck:** C-15/32**Incline:** 3**Insulation (Optional):** — Any UL Certified polyisocyanurate, any thickness.**Barrier Board:** — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.**Base Sheet:** — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.**Membrane:** — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²**12. Deck:** NC**Incline:** 3**Base Sheet:** — GAF "GAFLAS Stratavent Nailable Venting Base Sheet" or GAF "GAFLAS 75 Base Sheet" (Type G2), mechanically fastened.**Membrane:** — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²**13. Deck:** NC**Incline:** 3**Impact:** 4**Insulation (Optional):** — Any UL Classified Polyisocyanurate insulation, any thickness.**Coverboard:** — Continuus Materials Holdings "Everboard™ QB", minimum 5/16-in. thick adhered with OMG INC "Olybond 500" applied in ribbons 12 inches apart.**Membrane:** — "Duro-Fleece" (PVC), adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

Class C - Fully Adhered**1. Deck:** C-15/32**Incline:** Unlimited**Insulation:** — "Duro-Guard Iso Foil-H", "Duro-Guard ISO HSP" or "Duro-Guard Iso NB-H", any combination, any thickness.**Membrane:** — "Duro-Last", "Duro-Tuff", 50 or 60-mil, "Duro-Fleece Plus" or "Duro-Fleece", 50 or 60-mil thick.**Class A, B or C (See note) - Fully Adhered**

Incline is reduced to 1:12 when Type G3 mineral surfaced cap sheet is used as the surfacing.

Unless otherwise indicated, insulation is mechanically fastened in place.

1. Deck: NC**Incline:** See note**Insulation:** — EPS/perlite or EPS/wood fiber (perlite minimum 3/4-in. thick thickness or minimum 1/2-in. thick USG Interiors' "Micore MC 180", Huebert wood fiber, Georgia-Pacific Corp. "Strudi-Top", Wood Fiber Industries' "Structodeck", Celotex wood fiber, Temple-Inland "Fiber Base" or other wood fiber at 1-in. minimum thickness)**Membrane:** — "Duro-Last", "Duro-Tuff", 50 or 60-mil thick, "Duro-Fleece Plus" or "Duro-Fleece", 50 or 60-mil thick.**Surfacing:** — See note.

Note: Certification (A, B or C) will be the same as that for the original insulation/membrane roof covering system. Maximum incline, attachment of membrane, and surfacing of membrane shall be in accordance with Certification established for membrane/insulation roof covering system.

2. Deck: Deleted**3. Deck:** NC**Incline:** See note**Insulation:** — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness**Coverboard:** — Minimum 1-in. thick perlite or wood fiber.**Membrane:** — "Duro-Last" (PVC) or "Duro-Last X" or any UL Classified modified bitumen suitable for use with any roof insulation.**Surfacing:** — See note.

Note: Classification (A, B or C) will be the same as that for the original insulation/membrane roofing system. Maximum incline and surfacing shall be in accordance with the classification established for the insulation/membrane roofing system. Base sheet (if any) shall be in accordance with the classification established for the insulation/membrane roof covering system.

Class A - Mechanically Fastened**1. Deck:** C-15/32**Incline:** 2**Barrier Board:** — Minimum 1/2-in. thick gypsum board, joint offset 6-in. from joints in the roof deck.**Insulation (Optional):** —

A. "Duro-Guard ISO-II-A", any thickness.

B. Owens-Corning "Roof Deck Boards".

C. Wood fiber.

D. Perlite, 1-1/2 to 3-in. thick inclusive

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".**2. Deck:** NC**Incline:** 2

Insulation (Optional): —

- A. Any UL Certified polystyrene insulation (tapered or uniform thickness) any thickness covered with 1-in. thick perlite or 1-in. thick wood fiber or Atlas Roofing Corp. "FR10".
- B. "Duro-Guard ISO-II-A", any thickness.
- C. Owens-Corning "Roof Deck Boards".
- D. Wood fiber.
- E. Perlite 1-1/2 to 3-in. thick incl.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

3. **Deck:** C-15/32

Incline: 2

Slip Sheet: — One layer Atlas Roofing Corp. "FR50", 15-mil/minimum.

Insulation: — Two layers 3/4-in. thick perlite, butt joints staggered a minimum of 6-in.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X",

4. **Deck:** C-15/32

Incline: 3/4

Slip Sheet: — Four layers Atlas Roofing Corp. "FR10", mechanically fastened.

Insulation (Optional): — Glass fiber, perlite, "Duro-Guard ISO-II-A", Johns Manville "ENRGY 1" or Apache Products "Apache Pyrox", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X",

5. **Deck:** NC

Incline: Unlimited

Membrane: — "Duro-Last" (PVC) or "Duro-Last X",

6. **Deck:** NC

Incline: 2

Insulation: — Apache Products "Apache White Line", "Apache Pyrox", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

7. **Deck:** C-15/32

Incline: Unlimited

Base Sheet: — Class C mineral surfaced sheet roll roofing, granule side up.

Slip Sheet: — Four layers Atlas Roofing Corp. "FR10", mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

8. **Deck:** C-15/32

Incline: 2

Base Sheet: — Class C mineral surfaced sheet roofing, granule side up.

Slip Sheet: — Four layers Atlas Roofing Corp. "FR10", mechanically fastened.

Insulation (Optional): — Glass fiber or perlite, any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

9. **Deck:** C-15/32

Incline: Unlimited

Insulation: — Any UL Certified EPS insulation (tapered or uniform thickness) or polyisocyanurate, any thickness.

Barrier Board: — Minimum 1/2-in. thick gypsum board.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

10. **Deck:** NC

Incline: 1

Insulation: — "Duro-Guard ISO-II-A", minimum 1.0-in. thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

11. **Deck:** NC

Incline: Unlimited

Insulation: — Polystyrene, any thickness.

Slip Sheet: — One layer Atlas Roofing Corp. "FR10".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

12. **Deck:** NC

Incline: 2

Insulation: — Rmax Operating LLC "Multi-Max", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

13. **Deck:** NC

Incline: 2

Insulation: — Johns Manville "ENRGY 1", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

14. **Deck:** C-15/32

Incline: 1-1/2

Barrier Board: — Minimum 1/2-in. thick Gypsum board with butt joints offset 6-in. minimum from joints in roof deck.

Insulation (Optional): — "Duro-Guard ISO-II-A", Owens-Corning "Roof Deck Board", Johns Manville "ENRGY 1", perlite, any thickness, mechanically fastened or adhered with hot roofing asphalt.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

15. **Deck:** NC

Incline: 2

Insulation: — Any UL Certified EPS insulation (tapered or uniform thickness), any thickness.

Coverboard: — Apache Products "Apache Pyrox" or "Duro-Guard ISO-II-A", minimum 1-1/2-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

16. **Deck:** NC

Incline: 2

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

17. **Deck:** C-15/32

Incline: 1/2

Insulation: — 3/4-in. thick (minimum) Partek Insulation "Paroc Capboard" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

18. **Deck:** NC

Incline: Unlimited

Insulation: — Polystyrene, any thickness.

Slip Sheet: — Atlas Roofing Corp. "FR-10".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

19. **Deck:** C-15/32

Incline: Unlimited

Slip Sheet: — Four layers Atlas Roofing Corp. "FR-10".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

20. **Deck:** NC

Incline: 1

Insulation: — Carpenter Insulation "Foamfold".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

21. **Deck:** NC

Incline: 1

Slip Sheet: — One ply Atlas Roofing Corp. "FR50".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

22. **Deck:** C-15/32

Incline: 3

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last " (PVC).

23. **Deck:** NC **Incline:** 1-1/2
Insulation: — "Duro-Guard Iso II-H", any thickness.
Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32 in. thick plywood
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
24. **Deck:** NC **Incline:** 2
Insulation: — Plymouth Foam Inc. "Ultra-Fold TPM", "Ultra Guard TPM" or Pactive LLC "Duro-Guard XPS Fan Fold-P".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.
25. **Deck:** C-15/32 **Incline:** 2
Barrier Board: — Minimum 1/2-in. thick gypsum board mechanically fastened with all joints staggered 6-in from the plywood joints.
Insulation: — Plymouth Foam Inc. "Ultra-Fold TPM", "Ultra Guard TPM" or Pactive LLC "Duro-Fold".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.
26. **Deck:** C-15/32 **Incline:** 2
Barrier Board: — Minimum 1/2-in. thick gypsum board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Insulation (Optional): — Celotex "Star AP" or "Hy-Tec", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
27. **Deck:** NC **Incline:** 2
Insulation (Optional): — Celotex "Star AP" or "Hy-Tec", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
28. **Deck:** C-15/32 **Incline:** 1/4
Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.
Insulation (Optional): — Celotex "Star AP", "Hy-Tec", "Hy-Therm AP" or Apache Products "Apache Pyrox", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
29. **Deck:** NC **Incline:** 2
Insulation: — Celotex "Star AP" or "Hy-Tec", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
30. **Deck:** C-15/32 **Incline:** 1
Barrier Board: — Minimum 1/2-in. thick gypsum board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Insulation (Optional): — Celotex "Star AP" or "Hy-Tec", any thickness, mechanically fastened or adhered with hot roofing asphalt.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.
31. **Deck:** NC **Incline:** 2-1/2
Insulation: — Any UL Certified EPS insulation (tapered or uniform thickness), any thickness.
Barrier Board: — Celotex "Hy-Therm AP", 1-1/2 in. thick
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
32. **Deck:** NC **Incline:** 1
Insulation: — Elevate "ISO 95+GL", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
33. **Deck:** C-15/32 **Incline:** 2
Underlayment: — Two layers GAF "Versashield Underlayment".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".
34. **Deck:** C-15/32 **Incline:** 1/4

Slip Sheet: — Two layers GAF "VersaShield Underlayment" or "VersaShield FB-2S".

Insulation: — Any UL Classifield, any thickness (except EPS).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

35. **Deck:** C-15/32 **Incline:** 1/4

Slip Sheet: — Three layers GAF "VersaShield FB-1S".

Insulation: — Any UL Classifield, any thickness (except EPS).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

36. **Deck:** C-15/32 **Incline:** 1/4

Slip Sheet: — Two layers GAF "VersaShield FB-1S".

Insulation: — Any UL Classifield, any thickness (except EPS and wood fiberboard).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

37. **Deck:** NC **Incline:** See note **Impact:** 3

Insulation: — Polyisocyanurate insulation (see note), 1 to 3-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. polyplates and #14 screws.

Note: See individual Certification of specific polyisocyanurate insulation used.

38. **Deck:** NC **Incline:** See note **Impact:** 4

Insulation: — Polyisocyanurate insulation (see note), minimum 4-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. polyplates and #14 screws.

Note: See individual Certification of specific polyisocyanurate insulation used.

39. **Deck:** C-15/32 **Incline:** 3 **Impact:** 4

Insulation (Optional): — Polyisocyanurate insulation, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. polyplates or 3-in. metal plates and #14 screws.

40. **Deck:** NC **Incline:** 1/2 **Impact:** 4

Insulation: — Polyisocyanurate insulation, minimum 1-in. thick.

Slip Sheet: — Leggett & Platt "Nova Rollout" - mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. polyplates and #14 screws.

41. **Deck:** NC **Incline:** 1

Insulation: — The Dow Chemical Co. "Styrofoam Deckmate", "Styrofoam Deckmate Plus" or "Styrofoam Square Edge", any thickness, mechanically attached or loose laid.

Slip Sheet: — Atlas Roofing Corp. "FR10", "FR 11" or "FR 50".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

42. **Deck:** NC **Incline:** 2

Insulation: — Polystyrene, EPS or beadboard, any thickness.

Slip Sheet: — One layer GAF "VersaShield FB-1S" or "VersaShield FB-2S".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

43. **Deck:** C-15/32 **Incline:** See Note 2 **Impact:** 4

Base Sheet: — One ply Type G2, Atlas Roofing Corp. "FR-10" or GAF "VersaShield", mechanically attached.

Barrier Board: — Minimum 1/4-in. thick United States Gypsum Co. "Securock Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck. (See Note 1).

Insulation (Optional): — Polyisocyanurate insulation (See Note 2).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. polyplates and #14 screws.

Note 1: If insulation is not used, barrier board is to be mechanically fastened with 2-in. polyplates and #14 screws.

Note 2: Maximum incline shall be in accordance with Certification established for insulation/membrane roof covering system, but is limited to 3:12.

44. **Deck:** NC **Incline:** 3
Insulation (Optional): — Johns Manville "ENRGY 3", 4-in. thick.
Insulation: — Johns Manville "Invinisa Roof Board", 1/4-in. thick.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

45. **Deck:** NC **Incline:** 2-1/2
Insulation (Optional): — Elevate "ISO 95+GL", any thickness.
Slip Sheet: — "Duro-Last Ballast Mat" mechanically attached.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

46. **Deck:** NC **Incline:** 1
Insulation: — UL Certified EPS, any thickness, maximum 1.25 pcf, mechanically attached or loose laid.
Insulation: — "Duro-Guard ISO-II-A", minimum 1-in. thick.
Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

47. **Deck:** NC **Incline:** 2
Insulation: — UL Certified EPS, maximum 1.5-in. thick, maximum 1.25 pcf, mechanically attached or loose laid.
Insulation: — "Duro-Guard ISO-II-A", minimum 1-in. thick.
Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood
Membrane: — "Duro-Last" PVC, mechanically attached.

48. **Deck:** NC **Incline:** 1
Insulation: — UL Certified EPS, any thickness, maximum 1.25 pcf, mechanically attached or loose laid.
Insulation: — "Duro-Guard Iso II-H", minimum 1-in. thick.
Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

49. **Deck:** C-15/32 **Incline:** 1/2
Slip Sheet: — Two layers Atlas Roofing Corp. "FR-50".
Membrane: — "Duro Last" (PVC), mechanically attached.

50. **Deck:** NC **Incline:** 3
Insulation: — Owens Corning Specialty Products "Foamular", any thickness.
Slip Sheet: — Atlas Roofing Corp. "FR-10" or "FR-11".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

51. **Deck:** C-15/32 **Incline:** 1/2
Slip Sheet: — One layer Atlas Roofing Corp. "FR-10" or "FR-50".
Insulation: — "Duro-Guard ISO-III-A", minimum 1.5-in. thick with all joints staggered 6-in. minimum from plywood joints.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

52. **Deck:** C-15/32 **Incline:** See Note
Slip Sheet: — Two layers Atlas Roofing Corp. "FR-10", mechanically fastened.
Insulation (Optional): — Any UL Certified, any thickness (except EPS and wood fiberboard).
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.
Note: Membrane must be currently Certified for use over the insulation used. Actual incline is determined by the maximum existing membrane/insulation Certification incline, however the incline cannot exceed 3/4:12.

53. **Deck:** C-15/32 **Incline:** 1

Insulation (Optional): — Any UL Certified (except EPS and wood fiberboard), any combination, any thickness.

Insulation: — Atlas Roofing Corp. "AC Foam IV", minimum 1-in thick. All insulation joints must be staggered a minimum of 6-inches from the deck joints or from the insulation joints directly below.

Insulation (Optional): — Any UL Certified (except EPS and wood fiberboard), any combination, any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached, 40-mil thick minimum.

54. **Deck:** C-15/32

Incline: See note

Insulation (Optional): — "Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered" any thickness.

Insulation: — "Duro-Guard ISO-IV-A", minimum 1-inch thick polyisocyanurate insulation. All insulation joints must be staggered a minimum of 6-inches from the deck joints or from the insulation joints directly below.

Insulation (Optional): — "Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered" any thickness.

Membrane: — Any UL Certified membrane, 40-mil thick minimum, that currently has a noncombustible rating with "Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered" or insulation.

Note: The maximum incline shall be in accordance with the Class A Certification established for the membrane/insulation ("Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered", "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered"), roof covering assembly, however the incline cannot exceed 1:12.

55. **Deck:** Deleted

56. **Deck:** Deleted

57. **Deck:** Deleted

58. **Deck:** NC

Incline: See note

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness

Slip Sheet: — Atlas Roofing Corp. "FR-10"

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", or any UL Classified PVC.

Note: Maximum incline is determined by any existing insulation/membrane Classification, but cannot exceed 1:12.

59. **Deck:** NC

Incline: 3

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness.

Slip Sheet: — Atlas Roofing Corp. "FR-10"

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

60. **Deleted.**

61. **Deck:** NC

Incline: 1

Insulation: — "Duro-Guard EPS Fiberglass Facer-C".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

62. **Deck:** NC

Incline: 1/2

Insulation: — "Duro-Guard EPS Fiberglass Facer-C", any thickness and density.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", maximum 60-mil thick.

63. **Deck:** NC

Incline: 2

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick.

64. **Deck:** NC

Incline: 2

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick.

65. **Deck:** C-15/32

Incline: 2

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick.

66. **Deck:** NC

Incline: 1

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick.

67. **Deck:** NC

Incline: 1

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Tuff" (PVC), 80-mil thick.

68. **Deck:** C-15/32

Incline: 1

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick.

69. **Deck:** NC

Incline: 1-1/2

Insulation: — "Duro-Guard Iso Foil-H" or "Duro-Guard Iso NB-H", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

70. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard ISO-II-A", any thickness.

Membrane: — "Duro-Last EV" (PVC).

71. **Deck:** NC

Incline: 1-1/2

Insulation (Optional): — "Duro-Guard Iso II-H", any thickness.

Membrane: — "Duro-Last EV" (PVC).

72. **Deck:** C-15/32

Incline: Unlimited

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" or National Gypsum Co. "DEXcell Glass Mat Roof board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last EV" (PVC).

73. **Deck:** C-15/32

Incline: Unlimited

Vapor Barrier: — Soprema Inc. "Sopravap'R", self-adhered

Slip Sheet (Fire Barrier): — One or more layers GAF "VersaShield® Solo™ Fire Resistant Slip Sheet", mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X" or "Duro-Last EV" (PVC), mechanically fastened.

74. **Deck:** C-15/32

Incline: 1/4

Slip Sheet: — Four layers Atlas Roofing Corp. "FR10", mechanically fastened.

Insulation (Optional): — Rmax Operating LLC "Multi-Max", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

75. **Deck:** C-15/32

Incline: 1

Barrier Board: — Minimum 1/2-in. thick gypsum, joints offset 6-in. minimum from joints in the roof deck.

Insulation (Optional): — Rmax Operating LLC "Multi-Max", any thickness, mechanically fastened or adhered with hot roofing asphalt.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

76. **Deck:** NC

Incline: See note

Insulation : — "DURO-GUARD EPS FLAT", "DURO-GUARD EPS TAPERED", any thickness.

Slip Sheet: — Atlas Roofing Corp. Atlas "FR-10" or Elk "VersaShield FB-1S".

Membrane: — Any Duro-Last membranes

Note: Maximum incline is determined by any existing insulation/membrane Classification but cannot exceed 1:12.

77. **Deck:** NC

Incline: 3

Insulation : — "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", any thickness.

Slip Sheet: — Atlas Roofing Corp. "FR-10" or "FR-11".

Membrane: — Duro-Last "Duro-Last" (PVC) or "Duro-Last X".

78. **Deck:** C-15/32

Incline: Unlimited

Slip Sheet: — One or more plies GAF "VersaShield Solo Fire Resistant Slipsheet".

Membrane: — "Duro-Last" or "Duro-Tuff" or "Duro-Last EV" mechanically fastened (when insulation is utilized, the actual incline is determined by the existing membrane/insulation Classification).

79. **Deck:** C-15/32

Incline: See Note 1

Slip Sheet: — One or more plies GAF "VersaShield Solo Fire Resistant Slipsheet".

Insulation (Optional): — Any UL Classified, any thickness (except EPS and wood fiberboard).

Membrane: — "Duro-Last" or "Duro-Tuff" or "Duro-Last EV" mechanically fastened

Note 1: When insulation is utilized, the actual incline is determined by the existing membrane/insulation Classification.

Proposed assembly

80. **Deck:** NC

Incline: 2

Insulation (Optional): — Polystyrene, EPS or beadboard, any thickness.

Slip Sheet: — One ply GAF "VersaShield Solo Fire Resistant Slipsheet" or "VersaShield Underlayment".

Membrane: — "Duro-Last" or "Duro-Tuff" or "Duro-Last EV" mechanically fastened (when insulation is utilized, the actual incline is determined by the existing membrane/insulation Classification).

81. **Deck:** NC

Incline: 3

Insulation (Optional): — Any UL Classified Polyisocyanurate insulation, any thickness.

Coverboard: — Continuous Materials Holdings LLC "Everboard™ QB", minimum 5/16-in. thick.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick.

82. **Deck:** NC

Incline: See Note

Insulation (Optional): — "Duro-Guard Iso II-H" or "Duro-Guard Iso III-H " any combination, any thickness.

Coverboard: — 1/2-inch thick "Duro-Guard HD-MA"

Membrane: — Any UL Classified EPDM, PVC or TPO mechanically fastened membrane assembly.

Note: Maximum incline shall be in accordance with Classification established for insulation/membrane roofing system.

Class B - Mechanically Fastened

1. **Deck:** C-15/32

Incline: 3/4

Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.

Insulation (Optional): — Glass fiber or perlite, any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

2. **Deck:** C-15/32

Incline: Unlimited

Base Sheet: — Class C mineral surfaced sheet roll roofing, granule side up.

Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

3. **Deck:** C-15/32

Incline: 2

Base Sheet: — Class C mineral surfaced sheet roll roofing, granule side up.



Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.

Insulation (Optional): — Glass fiber or perlite, any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

4. Deck: NC

Incline: 3

Insulation: — Johns Manville "ENRGY 1", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

5. Deck: NC

Incline: Unlimited

Insulation: — "Duro-Guard ISO-II-A", any thickness.

Slip Sheet: — Atlas Roofing Corp. "FR50".

Membrane: — "Duro-Last " (PVC).

6. Deck: C-15/32

Incline: 1

Slip Sheet: — Atlas Roofing Corp. "FR10".

Insulation: — One of the following, minimum 2-in. thick with the butt joints in the insulation offset a minimum of 6-in. from the butt joints in the plywood roof deck.

A. "Duro-Guard ISO-II-A".

B. Apache Products "Apache Pyrox" or "Apache White Line".

C. Johns Manville "ENRGY 2G".

D. Elevate "ISO 95+GW".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

7. Deck: C-15/32

Incline: 1

Slip Sheet: — One layer Atlas Roofing Corp. "FR50".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

8. Deck: C-15/32

Incline: 1/2

Slip Sheet: — Atlas Roofing Corp. "FR10".

Insulation: — Celotex "Hy-Therm AP" or "Hy-Tec (Energy Lok)", minimum 2-in. thick with the butt joints in the insulation offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

9. Deck: C-15/32

Incline: 2

Underlayment: — Two layers GAF "Versashield Underlayment".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

10. Deck: C-15/32

Incline: 2

Slip Sheet: — One layer GAF "VersaShield Underlayment".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

11. Deck: C-15/32

Incline: 1-1/2

Slip Sheet: — One layer GAF "VersaShield Underlayment" or "VersaShield FB-2S".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

12. Deck: NC

Incline: 3

Insulation: — UL Certified EPS, maximum 1.5-in. thick, maximum 1.25 pcf, mechanically attached or loose laid.

Insulation: — "Duro-Guard ISO-II-A", minimum 1-in. thick.

Coverboard (Optional): — Minimum 7/16-in. thick oriented strand board (OSB) or minimum 15/32-in. thick plywood

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

13. **Deck:** NC **Incline:** Unlimited
Insulation: — UL Certified EPS, maximum 1.5-in. thick, maximum 1.25 pcf, mechanically attached or loose laid.
Coverboard: — Roxul "MonoBoard", minimum 1-in. thick.
Membrane: — "Duro-Last" PVC, mechanically attached.
14. **Deck:** C-15/32 **Incline:** 1/2
Slip Sheet: — One layer Atlas Roofing Corp. "FR-50".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.
15. **Deck:** C-15/32 **Incline:** 1
Slip Sheet: — Two layers Atlas Roofing Corp. "FR-50".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.
16. **Deck:** C-15/32 **Incline:** 1/2
Slip Sheet: — One ply Atlas Roofing Corp. "FR-10," mechanically fastened.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.
17. **Deck:** C-15/32 **Incline:** 1
Insulation (Optional): — Atlas Roofing Corp. "AC Foam II" or "AC Foam III", any thickness.
Insulation: — Atlas Roofing Corp. "AC Foam IV", minimum 1/2-inch thick. All insulation joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below.
Insulation (Optional): — Atlas Roofing Corp. "AC Foam II" or "AC Foam III", any thickness.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached, 40-mil thick minimum.
18. **Deck:** C-15/32 **Incline:** 1/2
Slip Sheet: — Two layers Atlas Roofing Corp. "FR-10" or "FR-50".
Insulation: — UL Certified polystyrene, minimum 3/4-in. thick.
Slip Sheet: — One layer Atlas Roofing Corp. "FR-10" or "FR-50".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached, minimum 40-mil thick.
19. **Deck:** C-3/8 **Incline:** 1/2
Insulation: — Minimum 3/4-in. thick perlite with the butt joints in the insulation offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.
20. **Deck:** C-15/32 **Incline:** See note
Insulation (Optional): — "Duro-Guard ISO-II-A" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered", any thickness.
Insulation: — "Duro-Guard ISO-IV-A" minimum 1/2-in. thick. All insulation butt joints must be staggered a minimum of 6-in. from the roof deck joints or from the insulation butt joints directly below.
Insulation (Optional): — "Duro-Guard ISO-II-A" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered", any thickness.
Membrane: — Any UL Certified membrane, 40-mil thick minimum, that currently has a noncombustible rating with "Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered" or insulation.
Note: The maximum incline shall be in accordance with the Class A Certification established for the membrane/insulation ("Duro-Guard ISO-II-A", "Duro-Guard ISO-II-A Tapered" or "Duro-Guard ISO-III-A" or "Duro-Guard ISO-III-A Tapered"), roof covering assembly, however the incline cannot exceed 1:12.
21. **Deck:** Deleted

22. Deck: NC**Incline:** 2-1/2**Insulation:** — Rmax Operating LLC "Multi-Max" or Johns Manville "ENRGY 1", any thickness.**Membrane:** — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.**23. Deck:** C-15/32**Incline:** 1/2**Slip Sheet:** — Atlas Roofing Corp. "FR10".**Insulation:** — Rmax Operating LLC "Multi-Max FA", minimum 2-in. thick with the butt joints in the insulation offset a minimum of 6-in. from the butt joints in the plywood roof deck.**Membrane:** — "Duro-Last" (PVC) or "Duro-Last X".**24. Deck:** NC**Incline:** 3**Insulation:** — Duro-Guard ISO II-H, any thickness.**Membrane:** — "Duro-Tuff" (PVC), 50 or 60-mil thick.**25. Deck:** NC**Incline:** 2**Insulation:** — Duro-Guard ISO II-H, any thickness.**Membrane:** — "Duro-Tuff" (PVC), 80-mil thick.**26. Deck:** C-15/32**Incline:** See Note**Insulation:** — "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", minimum 3/4-in. thick.**Slip Sheet:** — Two layers of GAF "VersaShield FB-1S".**Membrane:** — Any Duro-Last membrane.

Note: Maximum incline is determined by any existing insulation/membrane Classification, but cannot exceed 1/2:12.

27. **Deck:** C-15/32 **Incline:** 2

Insulation: — Polystyrene, EPS or beadboard, any thickness.

Slip Sheet: — One or more plies GAF "VersaShield Solo Fire Resistant Slipsheet."

Membrane: — "Duro-Last" or "Duro-Tuff" or "Duro-Last EV" mechanically fastened.

Class C - Mechanically Fastened

1. **Deck:** C-15/32(OSB or plywood) **Incline:** 1

Slip Sheet: — One layer Atlas Roofing Corp. FR10.

Insulation (Optional): — "Duro-Guard ISO-II-A", Johns Manville "ISO 1", Celotex "Hy-Tec", "Star AP" or "Hy-Therm AP", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

2. **Deck:** C-15/32(OSB or plywood) **Incline:** 1/2

Slip Sheet: — One layer Atlas Roofing Corp. "FR10".

Insulation (Optional): — Rmax Operating LLC "Multi Max", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

3. **Deck:** C-15/32 **Incline:** Unlimited

Insulation: — "Duro-Guard Iso Foil-H", "Duro-Guard ISO HSP" or "Duro-Guard Iso NB-H", any combination, any thickness.

Membrane: — "Duro-Last", "Duro-Tuff", 50 or 60-mil thick, "Duro-Fleece Plus" or "Duro-Fleece", 50 or 60-mil thick.

4. **Deck:** NC **Incline:** 1

Insulation: — UL Certified EPS, maximum 2.5 in. thick, maximum 1.5 pcf density, mechanically attached or loose laid.

Slip Sheet (Optional): — "Duro-Blue" (not UL Certified) or "Duro-Weave" (not UL Certified), mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically attached.

5. **Deck:** NC **Incline:** Unlimited

Insulation: — Duro-Guard ISO II-H, any thickness.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick.

6. **Deck:** NC **Incline:** 3

Insulation: — Duro-Guard ISO II-H, any thickness.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick.

Class A, B or C (See note) - Mechanically Fastened

1. **Deck:** Deleted

2. **Deck:** Deleted

3. Deck: NC**Incline:** See note

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", any thickness.

Coverboard: — Minimum 1-in. thick perlite or wood fiber.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", or any UL Classified PVC membrane suitable for use with any roof insulation.

Surfacing: — See note.

Note: Classification (A, B or C) will be the same as that for the original insulation/membrane roofing system. Maximum incline, attachment of membrane, and surfacing of membrane shall be in accordance with Classification established for membrane/insulation roofing system.

MAINTENANCE AND REPAIR SYSTEMS

Class A, B or C

1 Deck: C-15/32**Incline:** See Note 1

Existing Roof System: — Any Class A, B or C UL Classified EPDM, TPO, Hypalon, PVC, TPA, or CPE single ply membrane roof covering system, mechanically fastened or fully adhered, non-insulated or insulated, to retain existing Classification.

Primer: (optional) — "Duro-Shield Universal 2-Part Epoxy Primer".

Base coat: (optional) — "Duro-Shield Silicone Roof Coating" applied at 1.25 to 1.5 gal./100ft².

Top Coat: — "Duro-Shield Silicone Roof Coating" applied at 1.25 to 1.75 gal./ 100 ft².

Surfacing (Optional) - #11 ceramic coated roof granules applied at 30 lbs./100.ft.²

Note 1: Classification (A, B or C) and maximum incline will be the same as that of the Classified Roof Covering System (TGFU).

2. Deck: C-15/32**Incline:** See Note 1

Existing Roof System: — Class A, B or C, insulated or non-insulated, modified bitumen membrane roof covering system or mineral surfaced cap sheet, smooth or gravel surfaced BUR roof covering system, mechanically fastened or fully adhered, non-insulated or insulated, to retain existing Classification.

Primer: (optional) — "Duro-Shield Universal 2-Part Epoxy Primer" and/or "Duro-Shield Bleed Block Primer" Based Coat primer.

Base coat: (optional) — "Duro-Shield Silicone Roof Coating" applied at 1.25 to 1.5 gal./100ft².

Top Coat: — "Duro-Shield Silicone Roof Coating" applied at 1.25 to 1.75 gal./ 100 ft².

Surfacing (Optional) - #11 ceramic coated roof granules applied at 30 lbs./100ft.²

Note 1: Classification (A, B or C) and maximum incline will be the same as that of the Classified Roof Covering System (TGFU).

Class A

1. Deck: C-15/32**Incline:** 1/4

Existing Roof System: — Class A, B or C covered with:

Barrier Board: — Minimum 1/2-in. thick Gypsum board.

Insulation (Optional): —

A. Any UL Certified polystyrene insulation (tapered or uniform thickness) any thickness covered with minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or one layer of GAF "VersaShield FB-1S" or "VersaShield FB-2S".

B. Duro-Guard ISO-II-A, any thickness.

C. Owens-Corning "Roof Deck Boards".

D. Wood fiber.

E. Perlite, 1-1/2 to 3-in. thick

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

2. Deck: NC**Incline:** 3

Existing Roof System: — Class A gravel surfaced.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

3. Deck: NC**Incline:** 1/4

Existing Roof System: — Class A, B or C covered with:

Insulation (Optional): —

A. Any UL Certified polystyrene insulation (tapered or uniform thickness) any thickness covered with 1-in. thick perlite or 1-in. thick wood fiber or Atlas Roofing Corp. "FR10".

B. Duro-Guard ISO-II-A, any thickness.

C. Owens-Corning "Roof Deck Boards".

D. Wood fiber.

E. Perlite, 1-1/2 to 3-in. thick

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

4. Deck: C-3/4**Incline:** 1/4

Existing Roof System: — Class A covered with:

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

5. Deck: C-15/32**Incline:** 1/4

Existing Roof System: — Class A, B or C gravel surfaced. The gravel must be maintained at 400-lbs./100-ft.²

Separation Sheet: — Type 30 or G2 (45-lbs.) base sheet, Atlas Roofing Corp.

"FR10" or underlayment boards consisting of "Duro-Guard XPS Fan Fold-P" or Pablo Corp. "P14, PB4 or PB6," or minimum 1/2-in. thick wood fiber roof insulation.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

6. Deck: C-15/32**Incline:** 3/4

Existing Roof System: — Class A, B or C BUR system, smooth surface covered with:

Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

7. Deck: C-15/32**Incline:** Unlimited

Existing Roof System: —

A. Class A, B or C mineral or smooth surfaced asphalt felt roof covering system, covered with:

B. Single-ply (modified bitumen) roof system, covered with:

C. Class A, B or C asphalt organic felt or glass fiber mat shingles, covered with:
Slip Sheet: — Four layers Atlas Roofing Corp. "FR10", mechanically fastened.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

8. **Deck:** C-15/32 **Incline:** 1
Existing Roof System: — Class A gravel surfaced asphalt felt roof covering system.
 The gravel must be maintained at 400-lbs./100-ft.²
Insulation: — Carpenter Insulation "Foamfold".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

9. **Deck:** C-15/32 **Incline:** Unlimited
Existing Roof System: — Class A, B or C roof (smooth or granular surfaced cap sheet, shingles or modified bitumen single ply), covered with minimum 1/2-in. thick gypsum board.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

10. **Deck:** NC **Incline:** 3
Existing Roof System: — Insulated or uninsulated ballasted single ply membrane, ballast may be removed, covered with:
Slip Sheet: — Atlas Roofing Corp. "FR10" or GAF "Versa-Shield 1S", mechanically fastened or loose laid.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

11. **Deck:** C-15/32 **Incline:** 2
Existing Roof System: — Class A gravel surfaced asphalt felt roof covering system.
 The gravel must be maintained at 400-lbs./100-ft.²
Insulation: — Polyfoam Packers "ThermoSafe-RB" insulation.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

12. **Deck:** NC **Incline:** 2
Existing Roofing System: — Class A, B or C built up system, smooth surface, cap sheet or gravel surfaced; gravel may be removed.
Barrier Board (if gravel is removed): — 1/2-in. thick gypsum board.
Insulation: — Plymouh Foam Inc. "Ultra-Fold TPM", "Ultra Guard TPM" or Pactiv LLC "Duro-Fold", mechanically fastened.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

13. **Deck:** C-15/32 **Incline:** 2
Existing Roof System: — Class A, smooth or gravel surfaced (gravel maintained at 400-lbs./100-ft²)
Insulation: — Pactiv Corp. "PB6", "PB6W", "PG38", "PG39" or "Duro-Guard XPS Fan Fold-P".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

14. **Deck:** Deleted

15. **Deck:** Deleted

16. **Deck:** Deleted

17. **Deck:** Deleted

18. **Deck:** NC **Incline:** 1/2
Existing Roof System: — Class A, B or C built up system, smooth surface, cap

sheet or gravel surfaced, gravel may be removed.

Insulation: — "Duro-Guard EPS Fan-Fold-C", "Duro-Guard ISO HD-H", or "Duro-Guard HD-A", maximum 1-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

19. **Deck:** C-15/32

Incline: 1/2

Existing Roof System: — Class A, B or C roof covering system, gravel may be removed on gravel surfaced roof covering systems.

Insulation: — "Duro-Guard EPS Fan-Fold-C", any thickness.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

Surfacing: — River bottom stone (3/4-in. to 1 1/2-in. diameter) at minimum 900-lbs. per 100-ft²

20. **Deck:** C-15/32

Incline: Unlimited

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Barrier Board: — Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last SB IV" at 1-3/5-gal/100-ft²

21. **Deck:** C-15/32

Incline: Unlimited

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Barrier Board: — Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal/100-ft²

22. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard", or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board", or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last SB IV" at 1-3/5-gal/100-ft.²

23. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard", or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, adhered with "Duro-Last WB Adhesive II" at 1-gal/100-ft.²

24. Deck: C-15/32 **Incline:** Unlimited
Existing Roof System: — Class A, B or C, Certification to be retained, covered with:
Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard", or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last SB IV" at 0.75-gal/100-ft.²

25. Deck: C-15/32 **Incline:** Unlimited
Existing Roof System: — Class A, B or C, Certification to be retained, covered with:
Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board", or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Membrane: — "Duro-Last EV" (PVC), adhered with "Duro-Last WB Adhesive II" at 0.45-gal/100-ft.²

26. Deck: C-15/32 **Incline:** Unlimited
Existing Roof System: — Class A, B or C, Certification to be retained, covered with:
Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board", or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.
Membrane: — "Duro-Last EV" (PVC), mechanically attached.

27. Deck: NC **Incline:** 1/2
Existing Roof System: — Class A, B or C roof covering system (gravel may be removed from gravel built-up or ballasted single-ply system).
Insulation: — "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H", minimum 3-in. thick.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

28. Deck: C-15/32 **Incline:** 1/2
Existing Roof System: — Class A, B or C roof covering system (gravel may be removed from gravel built-up or ballasted single-ply system).
Insulation: — "Duro-Guard Iso III-H" or "Duro-Guard Iso Composite-H", minimum 3-in. thick.
Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

29. Deck: C-15/32 **Incline:** 2
Existing Roof System: — Class A, smooth or gravel surfaced (gravel maintained at 400-lbs./100-ft²).
Insulation: — Minimum 1-in. thick "Duro-Guard ISO II-A".
Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

30. Deck: C-15/32 **Incline:** 1
Existing Roof System: — Class A BUR system, insulated or uninsulated, Type G3

mineral surfaced cap or smooth surface.

Slip Sheet: — Maximum 4-mil thick "Duro-Weave" or "Duro-Blue" (not UL Certified), mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", or 50-mil thick "Duro-Tuff" (PVC), mechanically fastened.

Coating: — RM Lucas "8000" Silicone coating applied at 2.5 gallons/100-ft².

31. **Deck:** C-15/32

Incline: 1/2

Existing Roof System: — Class A, B or C built up system, smooth surface, cap sheet or gravel surfaced, gravel may be removed.

Coverboard: — Continuus Materials Holdings LLC "Everboard™ QB", minimum 5/16-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

32. **Deck:** C-15/32

Incline: 1/2

Existing Roof System: — Class A, B or C built up system, smooth surface, cap sheet or gravel surfaced, gravel may be removed.

Coverboard: — Continuus Materials Holdings LLC "Everboard™ QB", minimum 5/16-in. thick adhered with OMG INC's "Olybond 500", "Olybond 500 (Canister application)" or "SpotShot".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last WB Adhesive II" at 1-gal./100-ft.²

Class B

1. **Deck:** C-15/32

Incline: 1

Existing Roof System: — Class B BUR system smooth surfaced covered with:

Slip Sheet: —

A Type 30 or Type G2 (45-lbs.) base sheet.

B. One layer Atlas Roofing Corp. "FR10", mechanically fastened.

C. Pactiv Corp. "P14, PB4, PB6" or "Duro-Guard XPS Fan Fold-P".

D. Carpenter Insulation "Foamfold".

E. Minimum 1/2-in. thick wood fiber roof insulation.

F. 3-mil thick polyethylene film.

G. "Duro-Last Ballast Mat".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

2. **Deck:** C-15/32

Incline: Unlimited

Base Sheet: — One layer Type G2 Owens-Corning base sheet, mechanically fastened to deck.

Cap Sheet: — One layer Type G3 GAF Mineral Surfaced Cap Sheet, hot mopped.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

Coating: — Kool Seal "Uniflex" Elastomeric White Gray or Black roof coating at 3/4 to 1-gal/100-ft.²

Surfacing: — No. 11 roofing granules embedded in the wet coating at 50-lbs./100-ft²

3. **Deck:** C-15/32

Incline: Unlimited

Existing Roof System: —

A. Class A, B or C mineral or smooth surfaced asphalt felt roof covering system, covered

with:

B. Single-ply (modified bitumen) roof system, covered with:

C. Class A, B or C asphalt organic felt or glass fiber mat shingles, covered with:

Slip Sheet: — Two layers Atlas Roofing Corp. "FR10", mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

4. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class B Certification to be retained, covered with:

Slip Sheet: — Geotextile slip sheet (not UL Certified but max. 3-lbs./100-ft.²).

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened, Existing roof Certification remain the same.

5. **Deck:** NC

Incline: 1/2

Existing Roof System: — Class A, B or C roof covering system (gravel may be removed from gravel built-up or ballasted single-ply system).

Insulation: — A minimum 1.9-in. thick layer of "Duro-Guard Iso III-H".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

6. **Deck:** C-15/32

Incline: 1/2

Existing Roof System: — Class A, B or C roof covering system (gravel may be removed from gravel built-up or ballasted single-ply system).

Insulation: — A minimum 1.9-in. thick layer of "Duro-Guard Iso III-H".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

Class C

1. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class C Certification to be retained, covered with:

Slip Sheet (Optional): — Geotextile slip sheet (not UL Certified but max. 3-lbs./100-ft.²) or "Duro-Last Ballast Mat".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened, Existing roof Certification remain the same.

2. **Deck:** NC

Incline: 1/2

Existing Roof System: — Class A, B or C metal roof covering system, covered with:
Class A, B or C metal roof covering system, covered with:

Insulation: — "Duro-Guard EPS Fan-Fold-C", maximum 1-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

Class A, B or C

1. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened. Existing roof Certification remain the same.

2. **Deck:** C-15/32

Incline: 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Membrane: — "Duro-Last" (PVC), mechanically fastened, Existing roof Certification remain the same.

3. **Deck:** C-15/32 **Incline:** 2

Existing Roofing System: — Class A, B or C built up system smooth surface, cap sheet or gravel surfaced; gravel must maintain at 400-lbs. per 100-ft.²; existing Certification will be maintained.

Insulation: — Plymouth Foam Inc. "Ultra-Fold TPM", "Ultra Guard TPM" or Pactiv LLC "Duro-Fold".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened.

4. **Deck:** NC **Incline:** 1/2 **Impact:** 4

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Insulation: — Polyisocyanurate insulation, minimum 1-in. thick.

Slip Sheet: — Leggett & Platt "Nova Rollout" - mechanically fastened.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened with 2-in. Polyplates and #14 screws.

5. **Deck:** C-15/32 **Incline:** 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Slip Sheet: — GAF "VersaShield FB-1S" or GAF "VersaShield FB-2S" or GAF "VersaShield Underlayment", or Atlas Roofing Corp. "FR10" or Atlas Roofing Corp. "FR50" or Polyethylene (not UL Certified), 3 to 6-mils thick or Johns Manville "Invinsa Roof Board", 1/2-in. thick, mechanically attached.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened, Existing roof Certification remain the same.

6. **Deck:** C-15/32 **Incline:** 1

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Slip Sheet: — Geotextile slip sheet (not UL Certified but maximum 3-lbs./100-ft.²) or "Duro-Last Ballast Mat".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", mechanically fastened, Existing roof Certification remain the same.

7. **Deck:** C-15/32 **Incline:** 1/2

Existing Roof System: — (To maintain existing Certifications) - Any Class A, B or C, uncoated, insulated or uninsulated, modified bitumen membrane system or Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Fleece Plus" (PVC), adhered with OMG Inc. "Fleece Membrane Adhesive".

8. **Deck:** C-15/32 **Incline:** 1/2

Existing Roof System: — (To maintain existing Certifications) - Any Class A, B or C, uncoated, insulated or uninsulated, modified bitumen membrane system or Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Fleece Plus" (PVC), mechanically attached.

9. Deleted

10. Deleted

11. **Deck:** C-15/32 **Incline:** 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck®"

Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard", or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", adhered with "Duro-Last SB IV" at 1-1/3 gal/100-ft.²

12. **Deck:** Deleted

13. **Deck:** Deleted

14. **Deck:** NC **Incline:** 1/2

Existing Roof System: — Class A, B or C built-up or modified bitumen system, smooth surface, cap sheet or gravel surfaced (gravel maintained). Or Class A, B or C single-ply system (polystyrene in existing single-ply system must be below a coverboard or minimum 1-in. thick polyisocyanurate), to retain the existing Classification.

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", "Duro-Guard EPS Fan-Fold-C", maximum 1-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", or any UL Classified PVC, mechanically fastened.

15. **Deck:** C-15/32 **Incline:** 1/2

Existing Roof System: — Class A, B or C built-up system or modified bitumen system, smooth surface, cap sheet or gravel surfaced (gravel maintained) to retain the existing Classification.

Insulation: — "Duro-Guard EPS Flat Type VIII-C", "Duro-Guard EPS Taper Type VIII-C", "Duro-Guard EPS Flat Type II-C", "Duro-Guard EPS Taper Type II-C", "Duro-Guard EPS Fan-Fold-C", maximum 1-in. thick.

Membrane: — "Duro-Last" (PVC) or "Duro-Last X", or any UL Classified PVC, mechanically attached.

16. **Deck:** C-15/32 **Incline:** 3

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Slip Sheet: — GAF "VersaShield FB-1S", "VersaShield FB-2S" or "VersaShield Underlayment" or Atlas Roofing Corp. "FR10" or "FR50" or 1/4-in. thick Johns Manville "Invinsa Roof Board", mechanically attached.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, mechanically fastened.

17. **Deck:** C-15/32 **Incline:** 1/2

Existing Roof System: — (To maintain existing Certifications) - Any Class A, B or C, uncoated, insulated or uninsulated, modified bitumen membrane system or Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Fleece" (PVC) 50-mil to 80-mil thick, adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

18. **Deck:** C-15/32 or NC **Incline:** 1-1/2

Existing Roof System: — Any Class A, B or C roof covering system, to retain the existing Certification, is covered with:

Insulation: — "Duro-Guard Iso HD-H" or "Duro-Guard Iso Composite-H".

Membrane: — "Duro-Last" (PVC) or "Duro-Last X".

19. **Deck:** C-15/32 **Incline:** 2

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 50 or 60-mil thick, mechanically fastened.

20. **Deck:** C-15/32

Incline: 1

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Tuff" (PVC), 80-mil thick, mechanically fastened.

21. **Deck:** C-15/32

Incline: 1/2

Existing Roof System: — (To maintain existing Certifications) - Any Class A, B or C, uncoated, insulated or uninsulated, modified bitumen membrane system or Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Fleece" (PVC) 50-mil to 80-mil thick, mechanically fastened.

22. **Deck:** C-15/32

Incline: Unlimited

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard" or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board" or United States Gypsum Co. "Securock® Glass-Mat Roof Board" with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 50 or 60-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.²

23. **Deck:** C-15/32

Incline: 3

Existing Roof System: — Class A, B or C, Certification to be retained, covered with:

Insulation (Optional): — Any UL Certified, any thickness.

Barrier Board: — Minimum 1/4-in. thick Georgia-Pacific Gypsum LLC "DensDeck® Roofboard", "DensDeck Prime® Roofboard" or "DensDeck DuraGuard™ Roofboard", or National Gypsum Co. "DEXcell Glass Mat Roof Board" or "DEXcell FA Glass Mat Roof Board", or United States Gypsum Co. Securock® Glass-Mat Roof Board with the butt joints in the barrier board offset a minimum of 6-in. from the butt joints in the plywood roof deck.

Membrane: — "Duro-Fleece", 50 to 80-mil thick, fully adhered with "Duro-Grip CR-20", applied at a rate of 5-lbs./100-ft.² or H.B. Fuller Company "Millennium PG-1 EF ECO", applied in a spatter pattern.

24. **Deck:** C-15/32

Impact: 1-1/2, see Note 1

Existing Roof System: — Any Class A, B or C built-up roof system.

Slip Sheet: — One or more plies GAF "VersaShield Solo Fire Resistant Slipsheet."

Roof Covering: — "Duro-Last" or "Duro-Tuff" or "Duro-Last EV" mechanically fastened.

Note 1: Classification (A, B or C) and maximum incline will be the same as that of the Classified Roofing System (TGFU) currently limited to noncombustible roof deck, but not to exceed inclines greater than 1-1/2:12.

25. **Deck:** C-15/32 **Incline:** 1

Existing Roof System: — (To maintain existing Certifications) - Any Class A, B or C, uncoated, insulated or uninsulated, Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Last EV Fleece", adhered with "Duro-Grip CR-20", applied at a rate of 5 lb/100-ft².

26. **Deck:** C-15/32 **Incline:** 1

Existing Roof System: — (To maintain existing Certifications) – Any Class A, B or C, uncoated, insulated or uninsulated, Type G3 mineral surfaced cap BUR system.

Membrane: — "Duro-Last EV Fleece", adhered with Soprema "Duotack SPF", applied at a rate of 2.5-3.7 lb/100-ft².

27. **Deck:** C-15/32 **Incline:** 1/4

Existing Roof System: — Any Class A, B, or C UL Classified EPDM single ply membrane roof covering system, mechanically fastened or fully adhered, non-insulated or insulated, to retain existing Classification.

Slip Sheet: — "Duro-Blue" (not UL Certified), mechanically fastened.

Membrane: — "Duro-Last X", mechanically fastened.

Class A, B or C

1. **Deck:** NC **Incline:** 1/2

Existing Deck: — Class A, B or C built up system, smooth surface, cap sheet or gravel surfaced, gravel may be removed.

Barrier Board (if gravel is removed): — Minimum 1/2 in. thick gypsum board.

Insulation: — Maximum 1/2 in. thick "Duro-Guard EPS Fanfold", "Duro-Guard EPS Flat", "Duro-Guard EPS Tapered", mechanically fastened.

Membrane: — Duro-Last(PVC), mechanically fastened.

Last Updated on 2024-09-19

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2024 UL LLC."