

1. OWNER: PRATT, ROBERT W & ERIN D FIELD SURVEYING COMPLETED OCTOBER 21, 2021 BY FOUR POINTS SURVEYING & ENGINEERING. TOPOGRAPHIC DATA GENERATED FROM 2018 LIDAR DATA.

4. PROPERTY CORNERS WERE FOUND AS INDICATED HEREON PER FIELD SURVEY.

6. DIMENSIONS ARE IN FEET UNLESS OTHERWISE NOTED.

7. ALL FINISHED BARE GROUND SURFACES SHALL RECEIVE A MINIMUM OF 6" OF NATIVE TOPSOIL FOR FINAL GRADING AND SHALL BE RELATIVELY FREE OF STONES, CLODS, STICKS, AND OTHER DEBRIS. 8. ALL FINISHED GROUND SHALL BE PROPERLY SEEDED, FERTILIZED, MULCHED AND VEGETATION ESTABLISHED PER 9. ALL FINISHED GROUND SHALL BE STABILIZED WITH ENGINEER APPROVED STRAW EROSION CONTROL BLANKET.

APPLY GRASS SEED AND FERTILIZER OF OWNER'S CHOICE BEFORE AND AFTER STRAW BLANKET INSTALLATION AT THE APPROPRIATE SPECIFIC SEEDING RATE. 10. ALL DISTURBED AREAS NOT RECEIVING GRAVEL SURFACING SHALL BE RE-VEGETATED WITHIN ONE CONSTRUCTION

11. ALL DETAILS PROVIDED SHALL BE ADHERED TO UNLESS OTHERWISE APPROVED BY CIVIL ENGINEER OR RECORD. 12. CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UTILITIES. CALL THE UTILITY NOTIFICATION CENTER OF COLORADO (UNCC) AT 1-800-922-1987 AND ANY NECESSARY PRIVATE UTILITY TO PERFORM LOCATES PRIOR TO


1. GRADING SHALL OCCUR WITHIN THE PROPERTY LIMITS. WHERE OFF-SITE WORK IS APPROVED, WRITTEN PERMISSION OF THE ADJACENT PROPERTY OWNER MUST BE OBTAINED PRIOR TO ANY OFF-SITE GRADING OR CONSTRUCTION. 2. NO WORK SHALL OCCUR IN WETLANDS OR FLOODPLAINS WITHOUT APPROPRIATE PERMITS. ANY WORK SHALL BE IN ACCORDANCE WITH THE ISSUED PERMITS. 3. GRADING DESIGN DOES NOT CALL FOR THE CONSTRUCTION OF SLOPES GREATER 4. ALL FINISHED BARE GROUND SURFACES SHALL RECEIVE A MINIMUM OF 6" OF

NATIVE TOPSOIL FOR FINAL GRADING AND SHALL BE RELATIVELY FREE OF STONES, CLODS, STICKS, AND OTHER DEBRIS.

1. CONTRACTOR SHALL WORK IN A MANNER THAT MINIMIZES THE POTENTIAL FOR 2. CONTRACTOR SHALL PROPERLY INSTALL PERIMETER EROSION CONTROL

MEASURES ON ALL DOWNSLOPE LIMITS OF DISTURBANCE (E.G. STRAW WATTLE

3. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING, INSPECTING, AND MAINTAINING ALL NECESSARY EROSION AND SEDIMENT CONTROL DURING CONSTRUCTION AND REMOVING EROSION CONTROL WHEN PROJECT IS COMPLETE 4. ANY AREA DISTURBED BY CONSTRUCTION AND NOT PAVED OR NATURAL ROCK SURFACE SHALL BE REVEGETATED WITHIN ONE CONSTRUCTION SEASON.

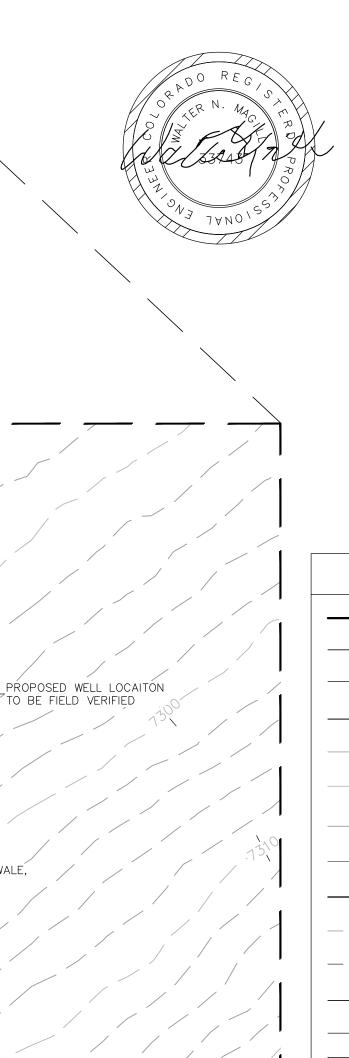

| <u>ABBREVIA</u> | <u>ATIONS:</u> |
|---|---|
| CO ESMT ELEC ELEV EOA EX FES FFE FDN FG INV LF MH PR SF SS | CORRUGATED METAL PIPE CLEANOUT EASEMENT ELECTRICAL |


PROJECT EARTHWORK QUANTITIES:

| | -, | |
|----------------------|--------|----------|
| AREA OF DISTURBANCE: | 17,868 | SQ. FT. |
| TOPSOIL STRIPPING: | 331 | CU. YDS. |
| TOTAL CUT: | 445 | CU. YDS. |
| TOTAL FILL: | 1,098 | CU. YDS. |
| NET (FILL): | 984 | CU. YDS. |
| NOTES | | |

NOTES: 1. TOPSOIL STRIPPING VOLUME ASSUMES AN AVERAGE TOPSOIL DEPTH OF 0.5 FEET. ACTUAL TOPSOIL DEPTH MAY VARY ACROSS THE ENTIRE AREA OF DISTURBANCE.

- 2. THE TOTAL CUT VOLUME INCLUDES TOPSOIL STRIPPING.
- 3. A FILL FACTOR OF 1.10 WAS USED FOR CUT-FILL VOLUME CALCULATIONS.
- 4. FILL VOLUME INCLUDES NATIVE MATERIAL AND ALL IMPORT MATERIALS. (I.E. GRAVEL, ASPHALT, BOULDERS, ETC.)
- 5. NET (FILL) EXCLUDES STRIPPED TOP SOIL. STRIPPED TOP SOIL MAY ONLY BE USED FOR MINIMUM 6" LIFT ACROSS ALL DISTURBED AREAS NOT RECEIVING HARDSCAPING.

| | LEGEND |
|---------------|------------------------------|
| | PROPERTY BOUNDARY |
| | ADJACENT PROPERTY BOUNDARY |
| | BUILDING ENVELOPE |
| | EXISTING EDGE OF ASPHALT |
| | EXISTING 2' CONTOUR |
| | EXISTING 10' CONTOUR |
| | PROPOSED 2' CONTOUR |
| | PROPOSED 10' CONTOUR |
| | PROPOSED BUILDING FOUNDATION |
| | PROPOSED BUILDING OVERHANG |
| | DECK |
| | PROPOSED DRAINAGE DITCH |
| | PROPOSED EDGE OF DRIVEWAY |
| | PROPOSED ASPHALT SURFACING |
| | PROPOSED EDGE OF GRAVEL |
| | PROPOSED GRAVEL SURFACING |
| | PROPOSED RIP RAP |
| الد عائد عائد | SURVEYED WETLANDS |
| | DRY STACK BOULDER WALL |
| | CMP CULVERT |

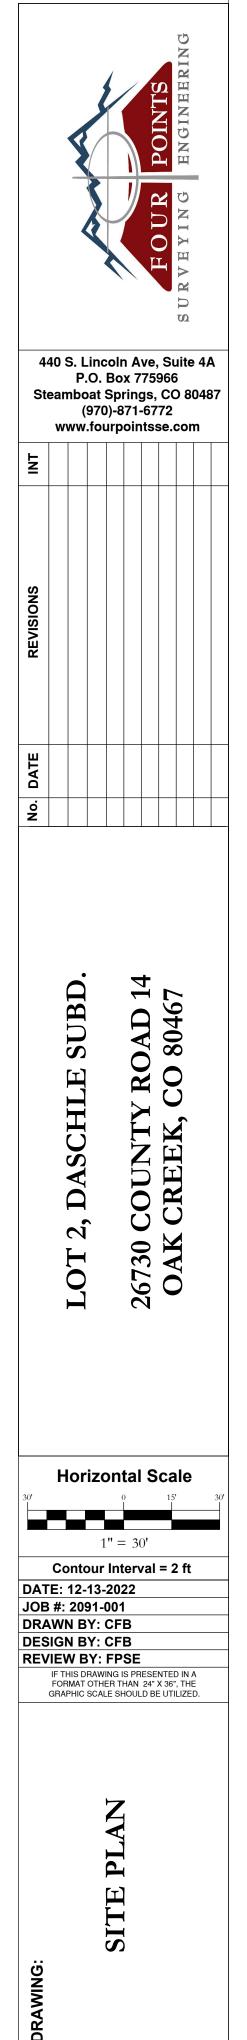

SHEET #

C2